

IC SOCKET, PRESS PIN, PITCH 2.54, ROW SPACE 15.24, WITHOUT BEAM

Material and Finish




Insulator: PBT, UL 94V-0
 Contact: Phosphor Bronze, Thickness 0.15mm
 Contact Plated: Tin plated
 Operating Temperature: -25°C ~ +85°C

Electrical

Contact Current Rating: 1 AMP.
 Contact Resistance: 20M ohms Max.
 Insulator Resistance: 1000M ohms Min.
 Dielectric Withstanding: 1000V AC RMS for 1 minute.

Mechanical

Insertion Force: 340g Max/ Pin
 Extraction Force: 50g Min/ Pin

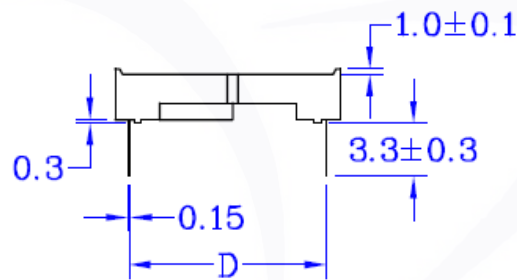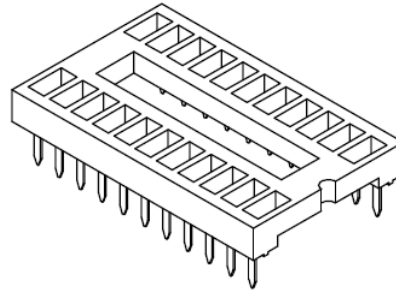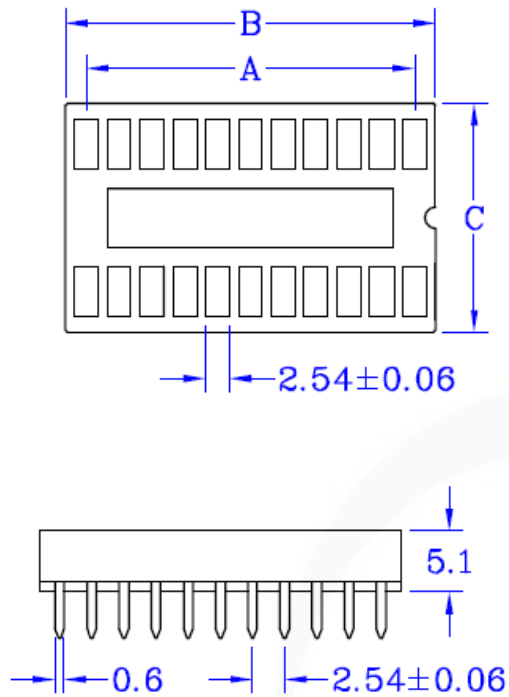

CONTACTS	A ^{+0.10} _{-0.10}	B ^{+0.12} _{-0.12}	C ^{+0.15} _{-0.15}	D ^{+0.30} _{-0.30}
06	5.08	7.52	10.06	7.62
08	7.62	10.06		
14	15.42	17.68		
16	17.78	20.22		
18	20.32	22.76		
20	22.86	25.30		
22	25.40	27.84		

Series	Pitch	Row	No. of Pin	Beam	Thickness of Pin Plating	Packing	Status
IC-	[2] 2.54	[3] 15.24	--	[0] W/O	[1] 0.15	[T0] TIN PLATED, LIGHT TIN	[R] RoHS
						[G] BAG [X] BOX [R] REEL [U] TUBE [Y] TRAY	