

# DISPLAYPORT CONNECTOR, FEMALE, SMT TYPE, 20 PINS

## Material


Body: LCP, UL 94V-0 rated, Black  
 Shield: Brass, Nickel plating  
 Contact: Brass, Tin plating on soldr tail;  
 Gold plating over Nickel on contact area

## Electrical

Operation Voltage: 40 VAC Max.  
 Current Rating: 0.5 Amp per contact  
 Contact Resistance: 30 M ohms Min.  
 Dielectric Withstanding Voltage: 500 VDC

## Environmental

Operating Temperature: -20°C ~ +85°C

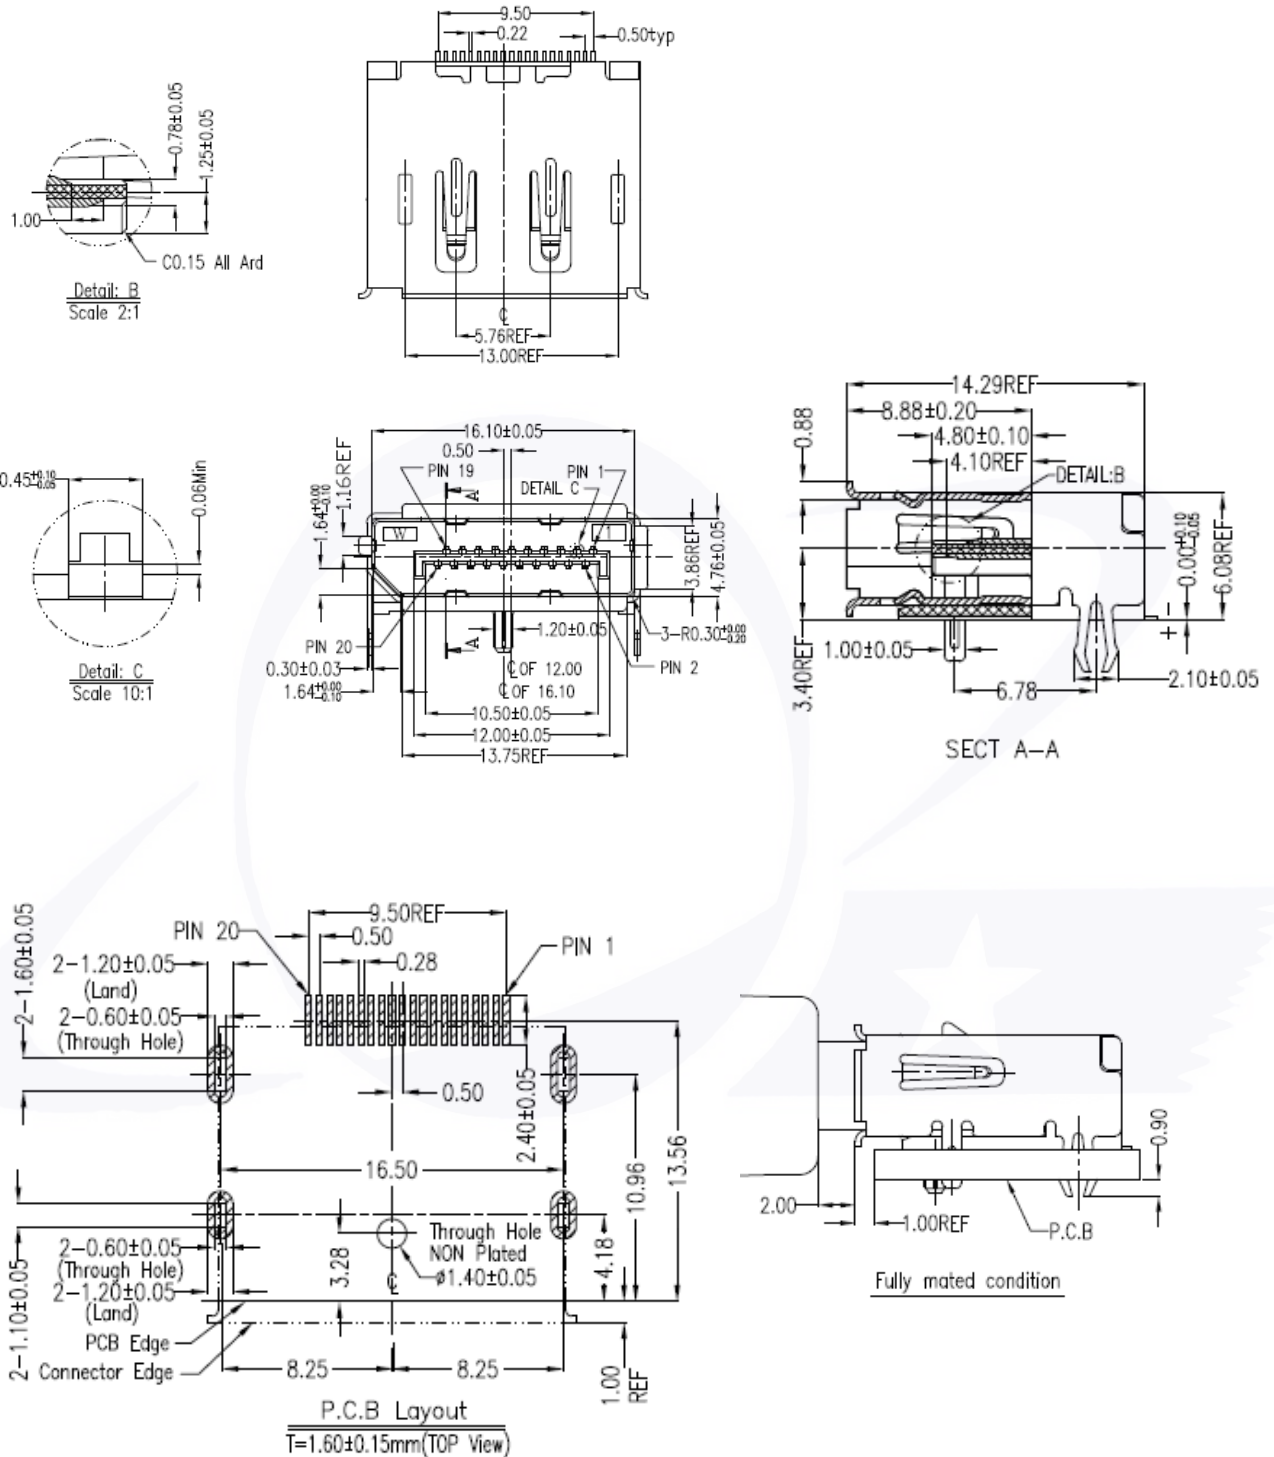

Series-	Style	No. Pins	Angle	Color	Plating	Packing-	Option-	Status-
DP-	1- [2] FEMALE	20	[RM] 90°/SMT	[0] BLACK	[T1] SELECTIVE GOLD PLATED 1u" [G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u" [G30] FULL GOLD PLATED 30u"	[R] REEL [Y] TRAY		[R]RoHS