

HDMI CONNECTOR, 19 PINS, FEMALE, DIP CONTACT, DIP GROUNDING, THREE ROWS

Material and Finish

Body: LCP, UL 94V-0 rated, Black

Shield: Brass

Plating: Nickel Plating

Contact: Phosphor Bronze

Plating: Gold plating over Nickel on contact area;

Tin plating on solder tail.

Electrical

Operation Voltage: 40 VAC Max.

Current Rating: 0.5 Amp. per contact


Contact Resistance: 30 Milliohms Max.

Insulation Resistance: 100 Megohms Min.

Dielectric Withstanding Voltage: 500VAC

Environmental

Operating Temperature: -55°C to +85°C

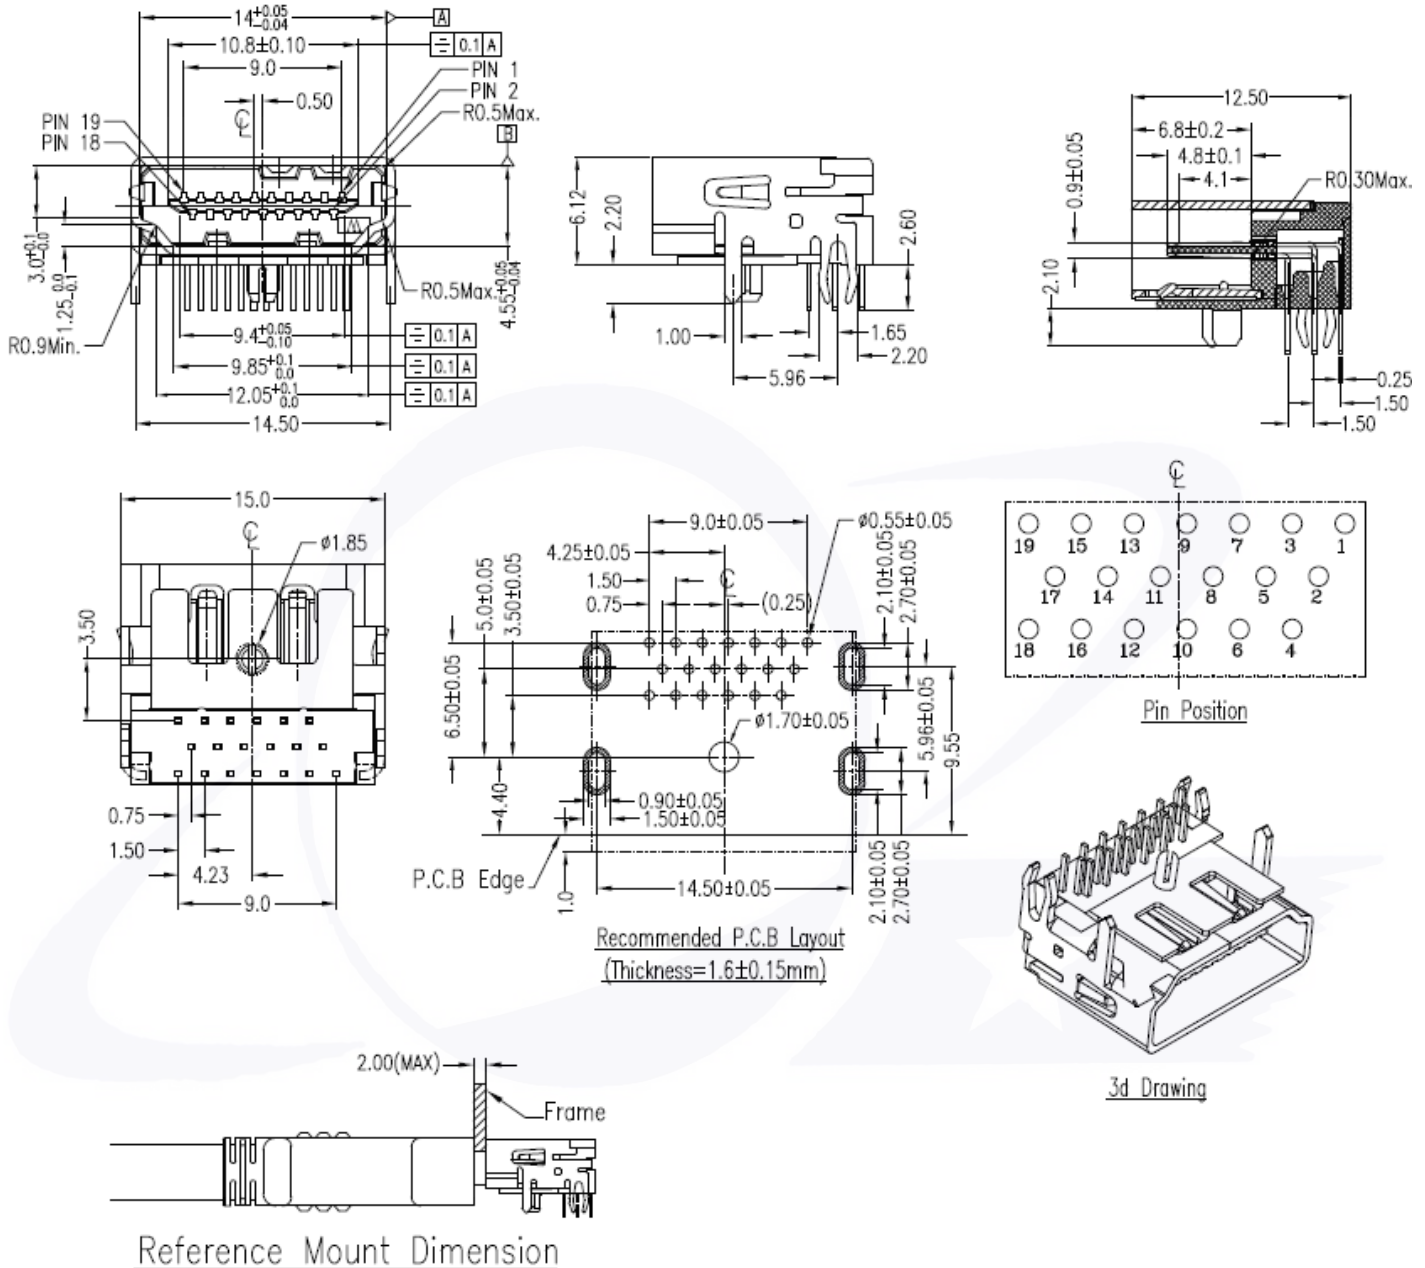

Series-	No. Pins	Type	Contact	Grounding	Shell Type	Plating-	Color	Packing-	Option-	Status-
HD-	2- [A] 19	[F] FEMALE	[D] DIP	[D] DIP	[1] W/ FLANGE	[T5] SELECTIVE GOLD PLATED 5u" [T15] SELECTIVE GOLD PLATED 15u"	[0] BLACK	[G] BAG [X] BOX [R] REEL [U] TUBE [Y] TRAY		[R]RoHS