

MINI DIN CONNECTOR, 6 PINS, DUAL DECK, WITH SHIELD
Material and Finish


Insulator: PBT UL94V-0
 Contact: Phosphor Bronze, Gold/Tin plated
 Shell: Brass (0.3T), Tin Plated

Electrical

Contact Current Rating: 1 Amp
 Dielectric Withstanding: AC 1000V/ Min. per minute.
 Insulation Resistance: 500M Ohms Min. at 500V DC.
 Contact Resistance: 30m Ohms Max.

Environmental

Operating Temperature: -55°C~105°C

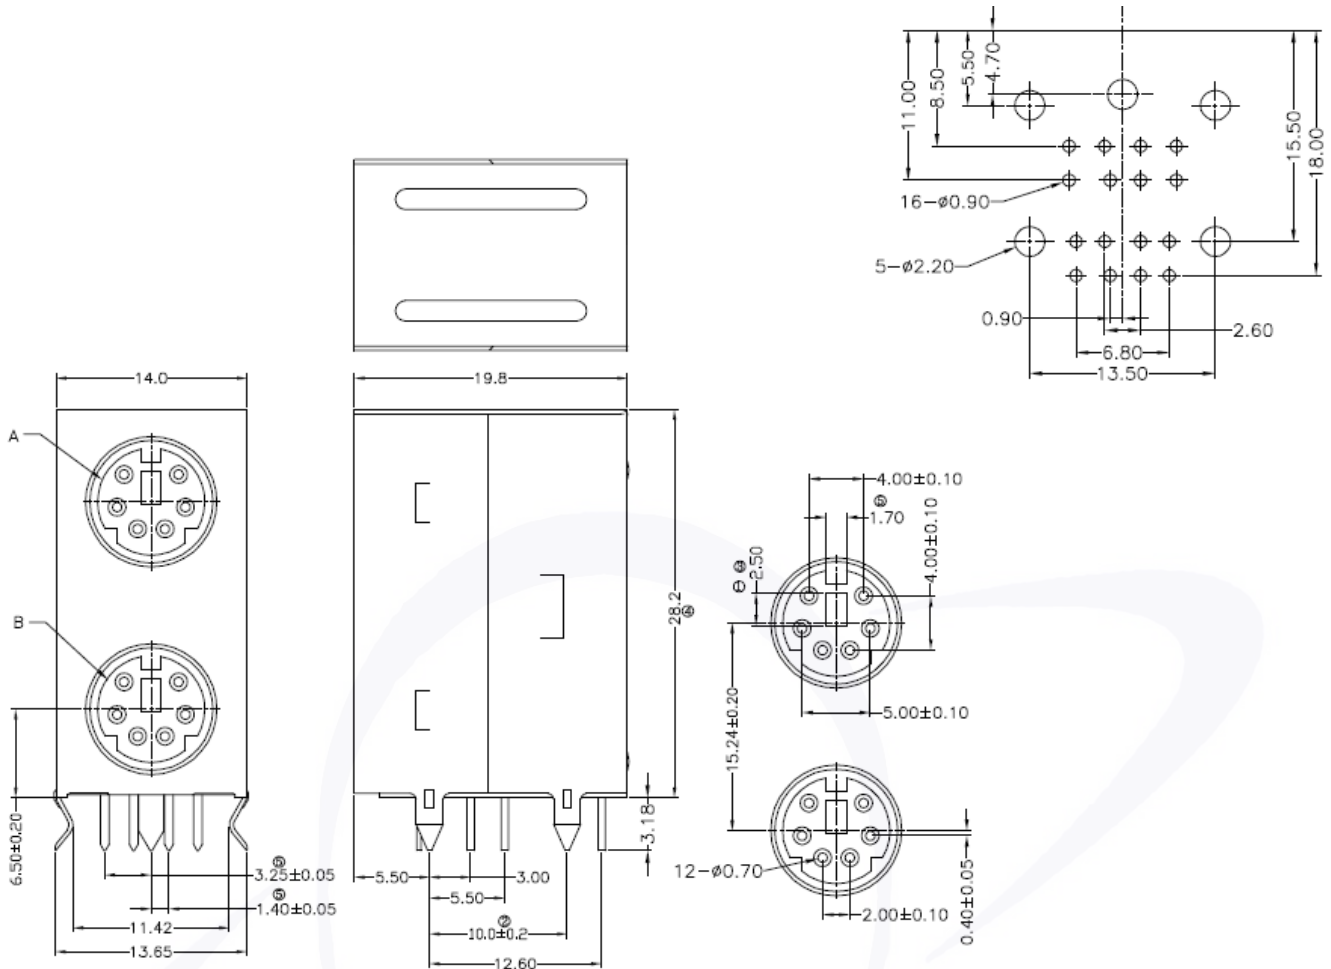

Series	No. Pins	Deck	Shield	Spring	Color	Plating	Packing	Options	Status
MDN-	1-	4	[DM] DUAL DECK W/ MINI D [1] W/ SHIELD	[0] W/O SPRING	[71] GREEN (UPPER) + PURPLE (LOWER)	[T1] Selective Gold Flash 1u"	[G] BAG [X] BOX [R] REEL [U] TUBE [Y] TRAY		[R] RoHS