
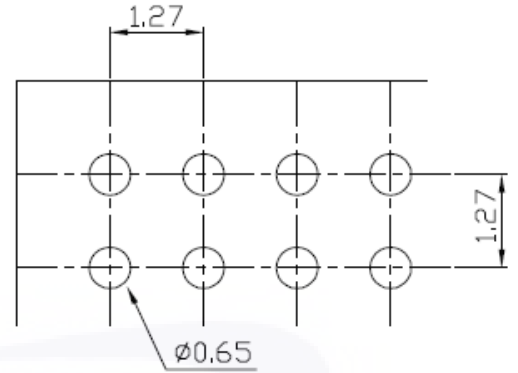


PIN HEADER, HEIGHT 1.50, PITCH 1.27, ROW SPACE 1.27, DUAL ROWS, STRAIGHT, DIP, CONTACT 3.00, TAIL 2.30
Material


Contact: Copper Alloy
 Insulator: Polyester, UL 94V-0
 Standard: NY6T
Plating: Gold Flash all over

Electrical

Current Rating: 1AMP
 Insulation Resistance: 1000M ohms Min.
 Withstanding Voltage: 500V AC
 Operating Temperature: -40°C ~ +105°C

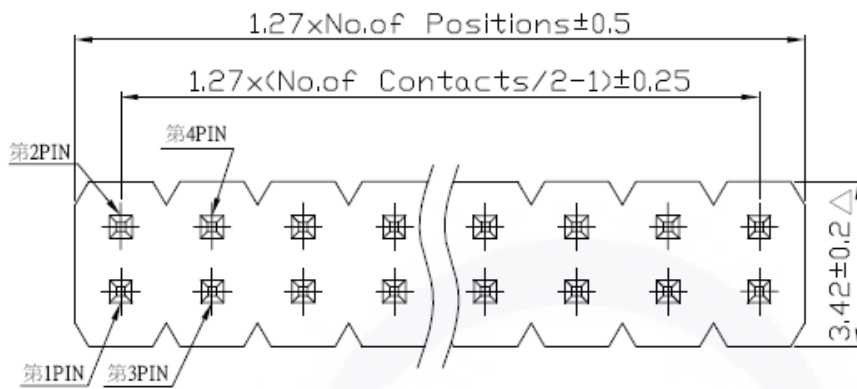

P.C.B Hole Layout

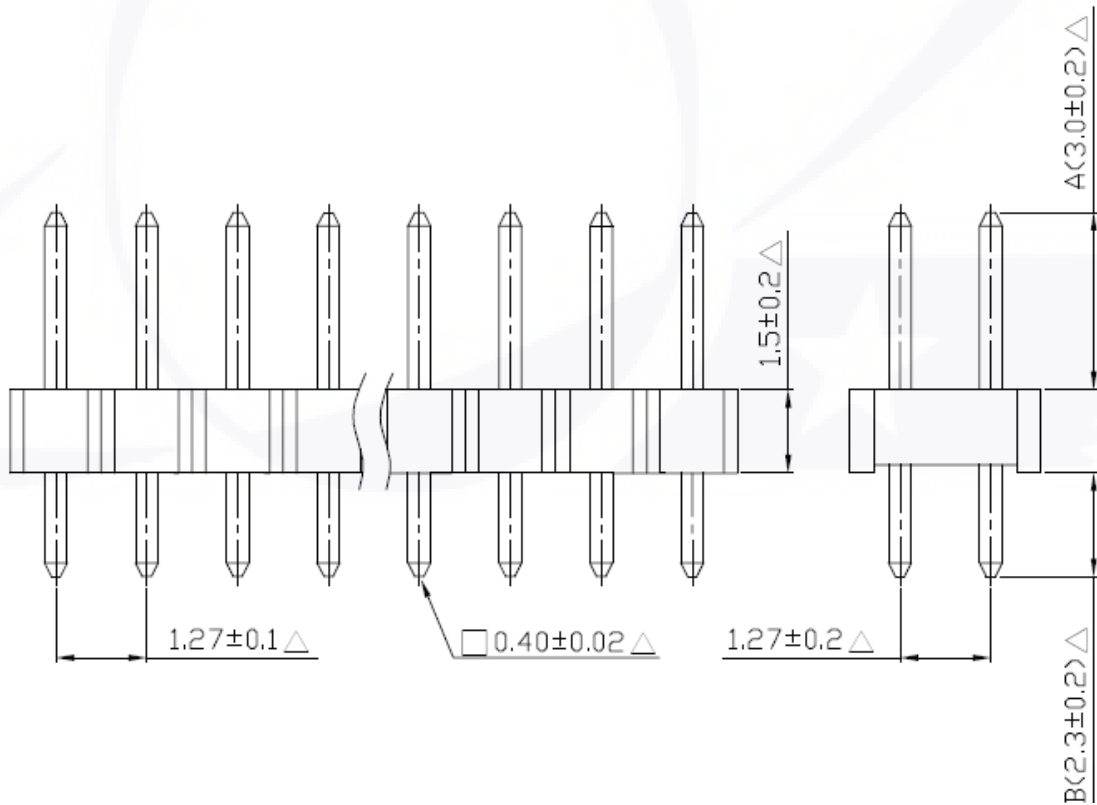

Series	Pitch	Row	Post	Cap	Plating	Plastic Height	Pin Length	Option	N0. Pins
P1S-	[2] 1.27	[2] 1.27	[0] W/O	[0] W/O	[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	150	-030023 (A / B)		2x_