

PIN HEADER HEIGHT 2.00 PITCH 2.00 ROW SPACE 2.00 DUAL ROWS RIGHT ANGLE DIP CONTACT 4.00 TAIL 2.80



Material

Contact: Copper Alloy
Insulator: Polyester, UL 94V-0



Electrical

Current Rating: 2AMP
Insulation Resistance: 3000M ohms Min.
Withstanding Voltage: 500V AC
Operating Temperature: -40°C ~ +105°C

Plating: Gold Flash all over

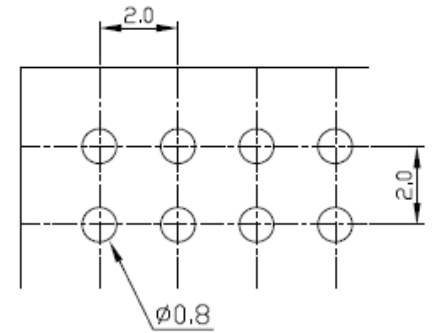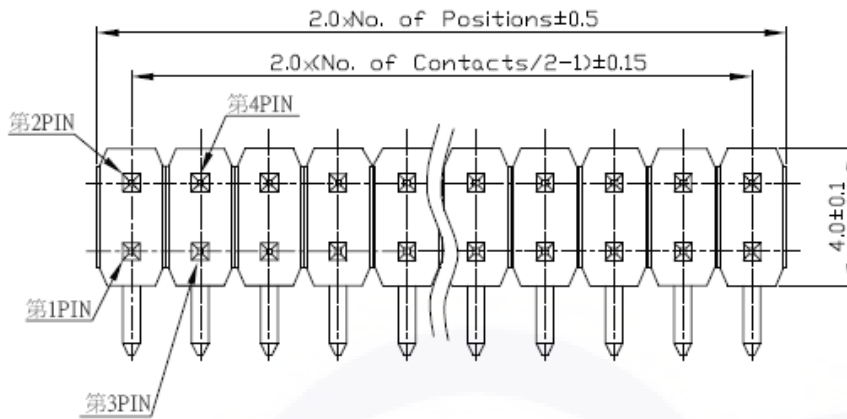

P.C.B Hole Layout

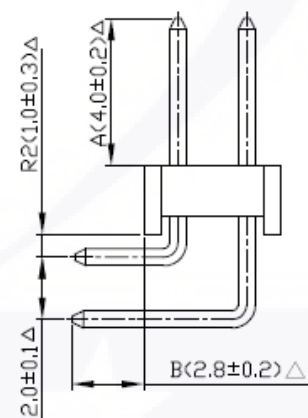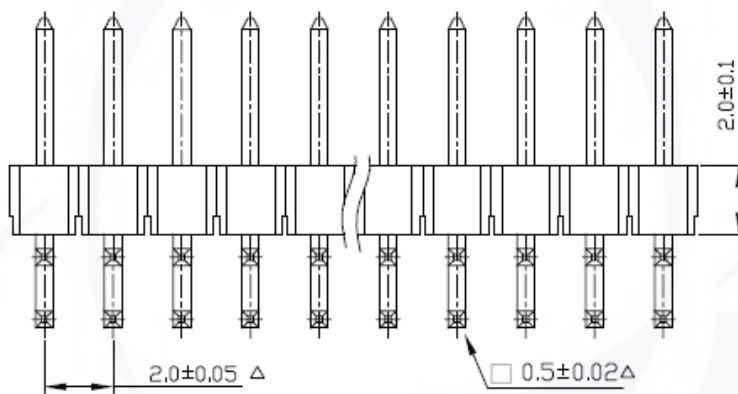

Series	Pitch	Row	Post	Cap	Plating	Plastic Height	Pin Length	Option	N0. Pins
P1R-	[3] 2.00	[3] 2.00			[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	200	-040028 (A / B)		2x_