

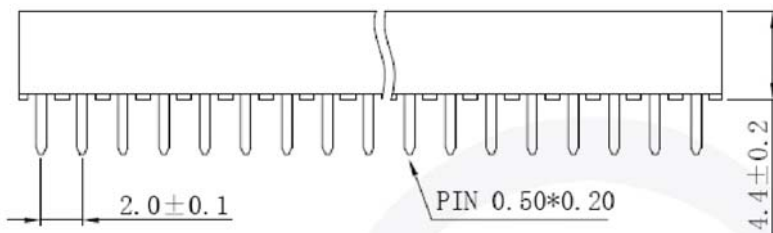


FEMALE HEADER, STRAIGHT, HEIGHT 4.40, PITCH 2.00, ROW SPACE 2.00, DUAL ROWS, CONTACT 2.50
Material and Finish

Housing: NY9T
 Contact: Phosphor Bronze
 Insulator: Thermoplastic UL94V-0
 Plating: Gold

Electrical

Current Rating: 1 AMP
 Insulation Resistance: 1000M ohms Min.
 Withstanding Voltage: 500V AC rms for 60 seconds
 Contact Resistance: 20M ohms Max.
 Operating Temperature: -40°C ~ +105°C

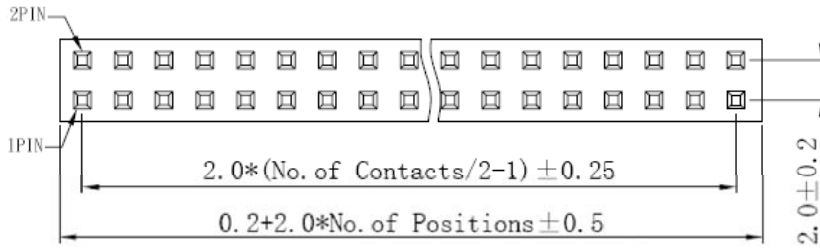

P.C.B Layout

Series	Plastic height	Pitch	Row	Row Option	N0. Pins Per Row	Post	Plating	Packing	Status	Option	Pin Length
FS- (STRAIGHT)	1- [G] 4.40	[3] 2.00	[3] 2.00	[D] DUAL ROWS	--	[0] W/O	[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	[G] BAG [X] BOX [R] REEL [U] TUBE [Y] TRAY	[R] RoHS		-025