


FEMALE HEADER, RIGHT ANGLE, HEIGHT 8.50, PITCH 2.54, ROW SPACE 2.54, DUAL ROWS, CONTACT 3.10

Material and Finish

Housing: Thermoplastic, UL 94V-0, BLACK
Terminal: Copper Alloy, T=0.40mm, Gold plating.

Electrical

Current Rating: 3.0 AMP Max.
Insulation Resistance: 1000M ohms Min. at 1000V DC
Withstanding Voltage: 1000V AC rms for 60 seconds
Contact Resistance: 30M ohms Max.
Operating Temperature: -55°C ~ +105°C

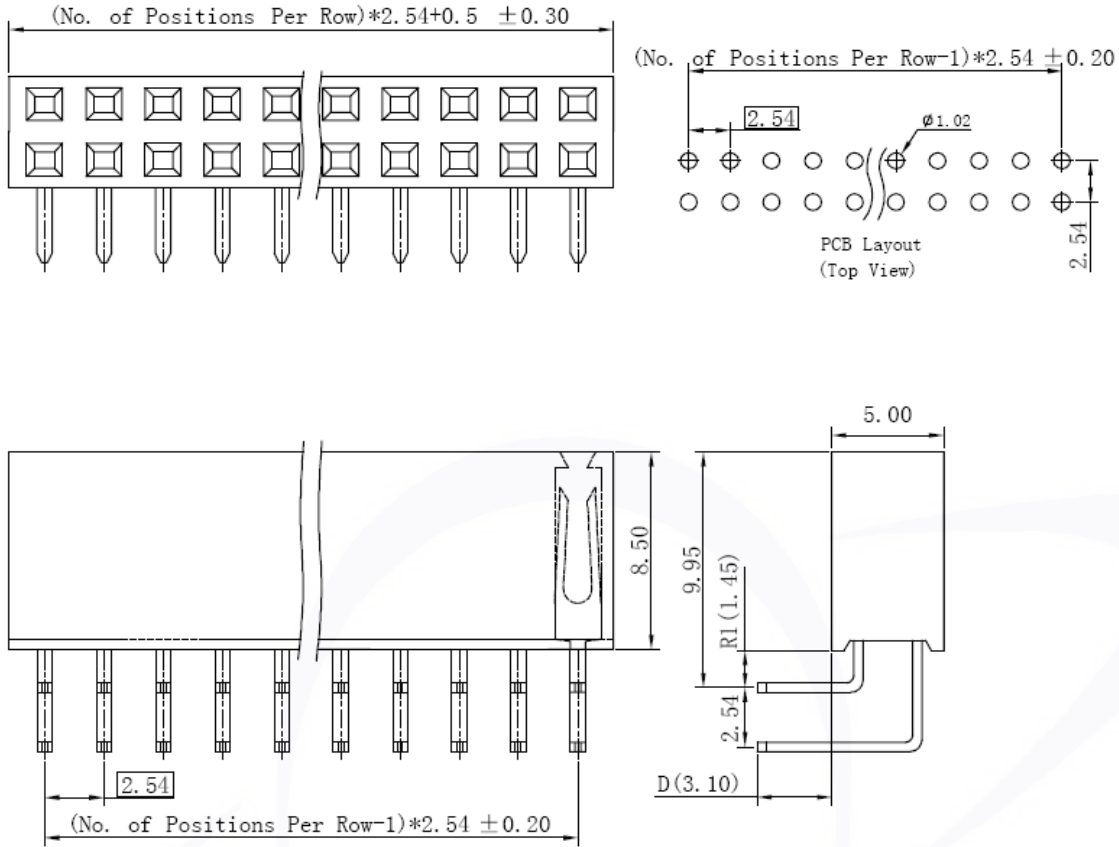

Series	Plastic height	Pitch	Row	Row Option	N0. Pins Per Row	Post	Plating	Packing	Status	Option	Pin Length
FR- (RIGHT ANGLE)	1- [M] 8.50	[4] 2.54	[4] 2.54	[D] DUAL ROWS	--	[0] W/O	[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	[G] BAG [X] BOX [R] REEL [U] TUBE [Y] TRAY	[R] RoHS		-031