


## WAFER CONNECTOR, PITCH 1.25, SMT, RIGHT ANGLE, SINGLE ROW, CRIMP STYLE

### Material and Finish

Contact: Brass, Tin plated  
 Base: Nylon PA46, UL 94V-0  
 Plating: Ni 30u" Sn 120u" over all.

### Electrical

Current Rating: 1A AC/DC  
 Withstanding Voltage: 250V AC RMS for 1 minute.  
 Insulation Resistance: 100M ohms Min.  
 Temperature Range: -45°C ~ +85°C  
 Contact Resistance: 20M ohms Max.

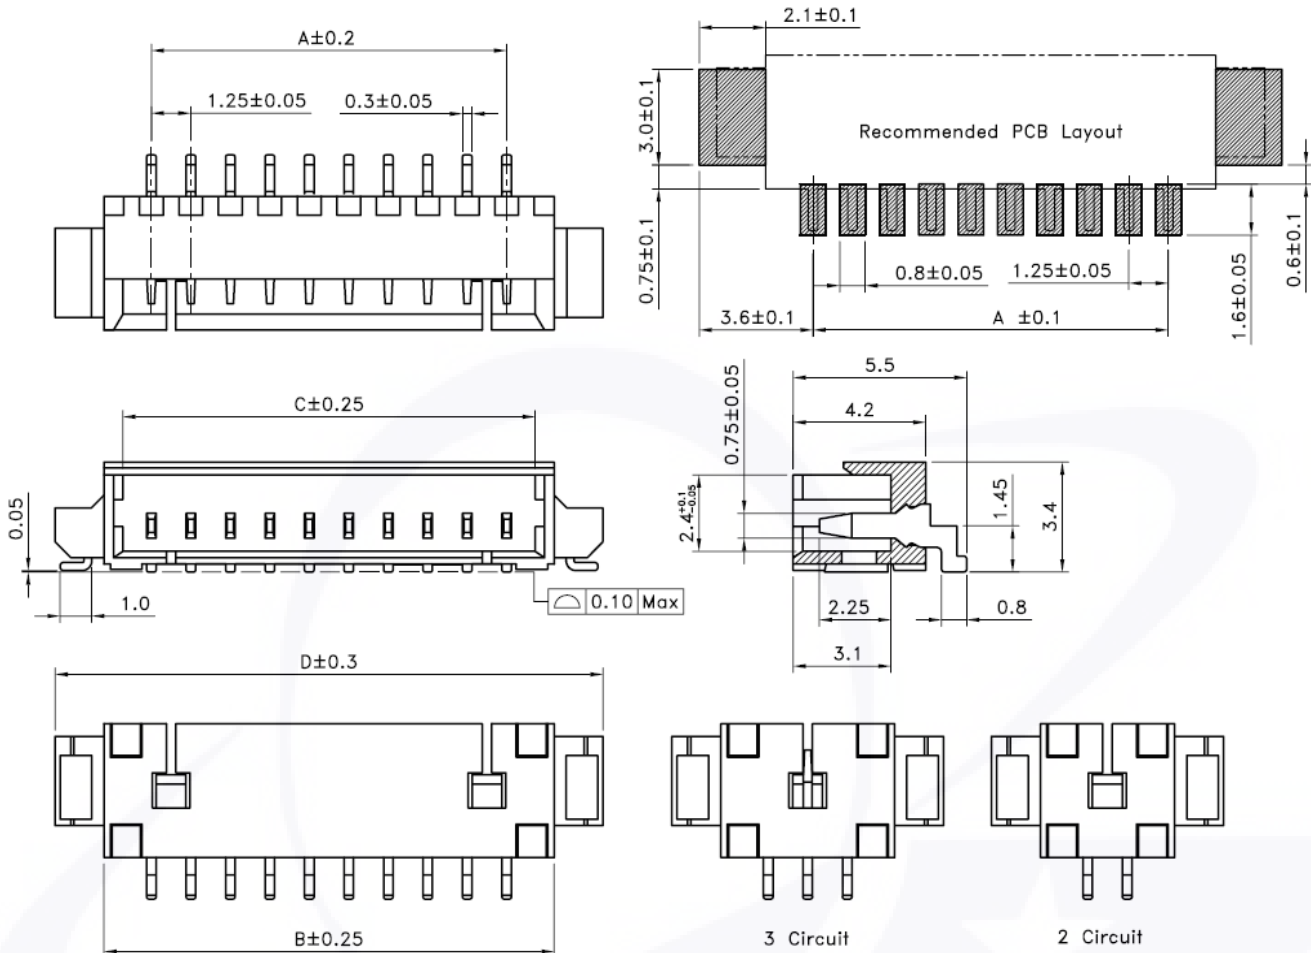

Poles	Dimensions (mm)			
	A	B	C	D
2	1.25	4.25	3.05	7.10
3	2.50	5.50	4.30	8.35
4	3.75	6.75	5.55	9.60
5	5.00	8.00	6.80	10.85
6	6.25	9.25	8.05	12.10
7	7.50	10.50	9.30	13.35
8	8.75	11.75	10.55	14.60
9	10.00	13.00	11.80	15.85
10	11.25	14.25	13.05	17.10
11	12.50	15.50	14.30	18.35
12	13.75	16.75	15.55	19.60
13	15.00	18.00	16.80	20.85
14	16.25	19.25	18.05	22.10
15	17.50	20.50	19.30	23.35

Series	Free Code	Pitch	Style	Plating
WFC	1-	[B] 1.25mm	[RM] 90°/SMT	[T0] TIN PLATED