


WAFER CONNECTOR, PITCH 3.96, DIP, STRAIGHT, SINGLE ROW, CRIMP STYLE

Material and Finish




Contact: Brass, Tin Plated
Base: Nylon 66, UL 94V-0

Electrical

Voltage Rating: 250V AC/DC
Current Rating: 7A AC/DC
Withstanding Voltage: 1500V AC RMS for 1 minute.
Insulation Resistance: 1000M ohms Min.
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20M ohms Max.

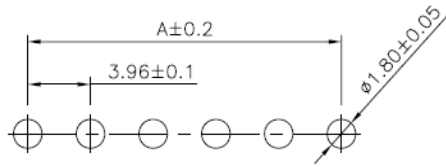

Recommend PCB Layout

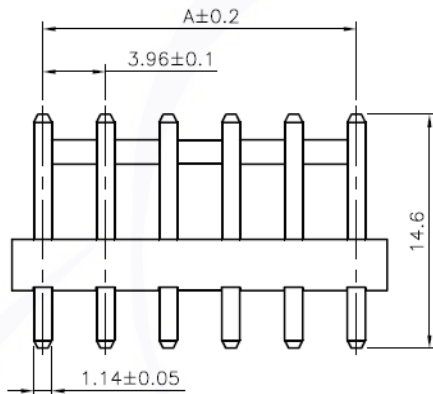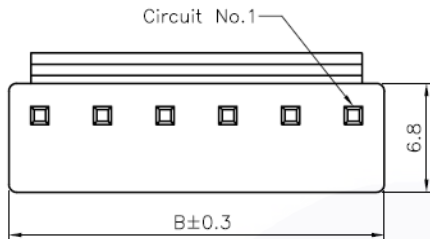

Poles	Dimension(mm)	
	A	B
2	3.96	7.86
3	7.92	11.82
4	11.88	15.78
5	15.84	19.74
6	19.80	23.70
7	23.76	27.66
8	27.72	31.62
9	31.68	35.58
10	35.64	39.54
11	39.60	43.50
12	43.56	47.46
13	47.52	51.42
14	51.48	55.38
15	55.44	59.34

Series	Free Code	Pitch	Style	Row Option	No. Pins Per Row	Color	Plating	Packing	Status
WF-	1-	[G] 3.96mm	[S] 180°/DIP [R] 90°/DIP	[S] SINGLE ROW		[1] WHITE [11] IVORY [12] BEIGE [2] TRANSPARENT	[T0] TIN PLATED	[G] BAG	[R] RoHS