


WAFER CONNECTOR, PITCH 3.96, DIP, RIGHT ANGLE, SINGLE ROW, CRIMP STYLE

Material and Finish

Contact: Brass, Tin plated
Base: Nylon PA66, UL 94V-2

Electrical

Voltage Rating: 250V AC/DC
Current Rating: 7A AC/DC
Withstanding Voltage: 1500V AC RMS for 1 minute.
Insulation Resistance: 1000M ohms Min.
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20M ohms Max.

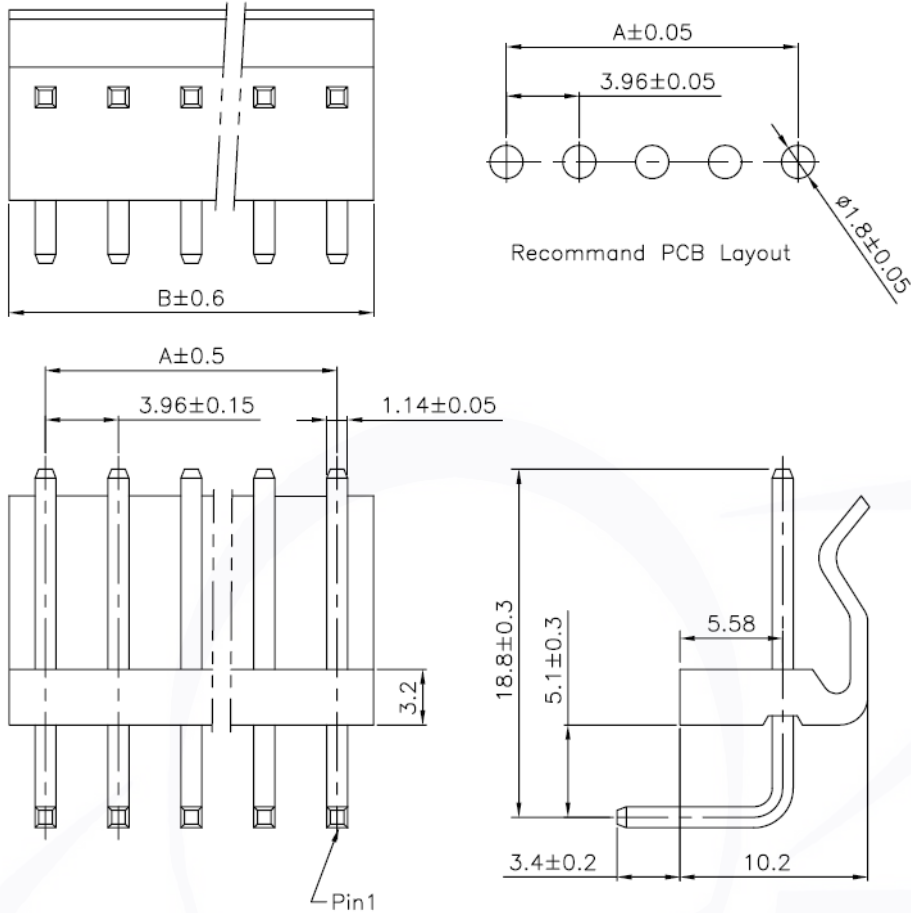

Poles	Dimensions (mm)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44

Series	Free Code	Pitch	Style	Row Option	No. Pins Per Row	Color	Plating	Packing	Status
WF	1-	[G] 3.96mm	[S] 180°/DIP [R] 90°/DIP	[S] SINGLE ROW		[1] WHITE [11] IVORY [12] BEIGE [2] TRANSPARENT	[T0] TIN PLATED	[G] BAG	[R] RoHS