





WAFER CONNECTOR, PITCH 2.00, DIP, STRIGHT, SINGLE ROW, DISCONNECTABLE CRIMP STYLE

Material and Finish

Contact: Brass, Tin plated
Base: Nylon 66, UL 94V-0

Electrical

Voltage Rating: 250V AC/DC
Current Rating: 2A AC/DC
Withstanding Voltage: 800V AC RMS for 1 minute.
Insulation Resistance: 1000M ohms Min.
Temperaure Range: -25°C ~ +85°C
Contact Resistance: 20M ohms Max.

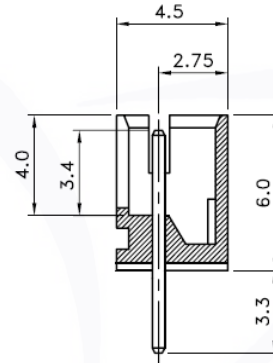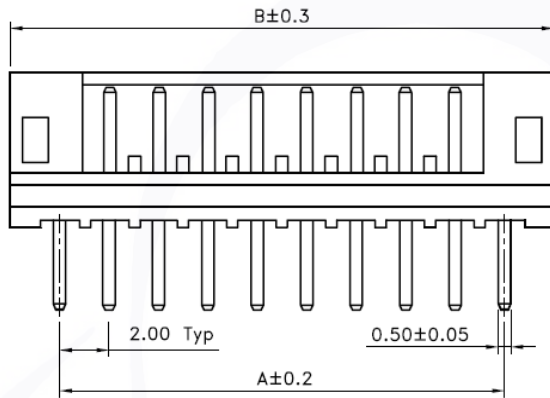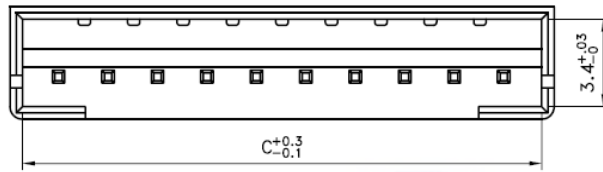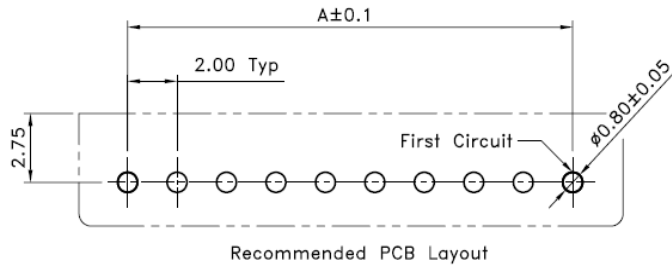

Poles	Dimension(mm)		
	A	B	C
2	2.00	6.00	5.00
3	4.00	8.00	7.00
4	6.00	10.00	9.00
5	8.00	12.00	11.00
6	10.00	14.00	13.00
7	12.00	16.00	15.00
8	14.00	18.00	17.00
9	16.00	20.00	19.00
10	18.00	22.00	21.00
11	20.00	24.00	23.00
12	22.00	26.00	25.00
13	24.00	28.00	27.00
14	26.00	30.00	29.00
15	28.00	32.00	31.00
16	30.00	34.00	33.00

Series	Free Code	Pitch	Style	Row Option	No. Pins Per Row	Color	Plating	Packing	Status
WFO	1-	[D] 2.00mm	[S] 180°/DIP [R] 90°/DIP	[S] SINGLE ROW		[1] WHITE [11] IVORY [12] BEIGE [2] TRANSPARENT	[T0] TIN PLATED	[G] BAG	[R] RoHS