

eSATA CONNECTOR, 7 PINS, MALE, STANDARD SMT, RIGHT ANGLE

Material

Housing: LCP(Black), UL 94V-0 Rated
 Contact: Brass
 Plating: Gold plating over Nickel on contact area
 Tin plating on solder tail.

Electrical


Operation Voltage: 100 VAC Max.
 Current Rating: 1.5 Amp per contact.
 Contact Resistance: 30m ohm Min.
 Dielectric Withstanding Voltage: 500VAC

Mechanical

Insertion Force: 4080g Max.
 Withdrawal Force: 1020g Min.
 Durability: 2500 cycles.

Environmental

Operating Temperature: -55°C to +125°C

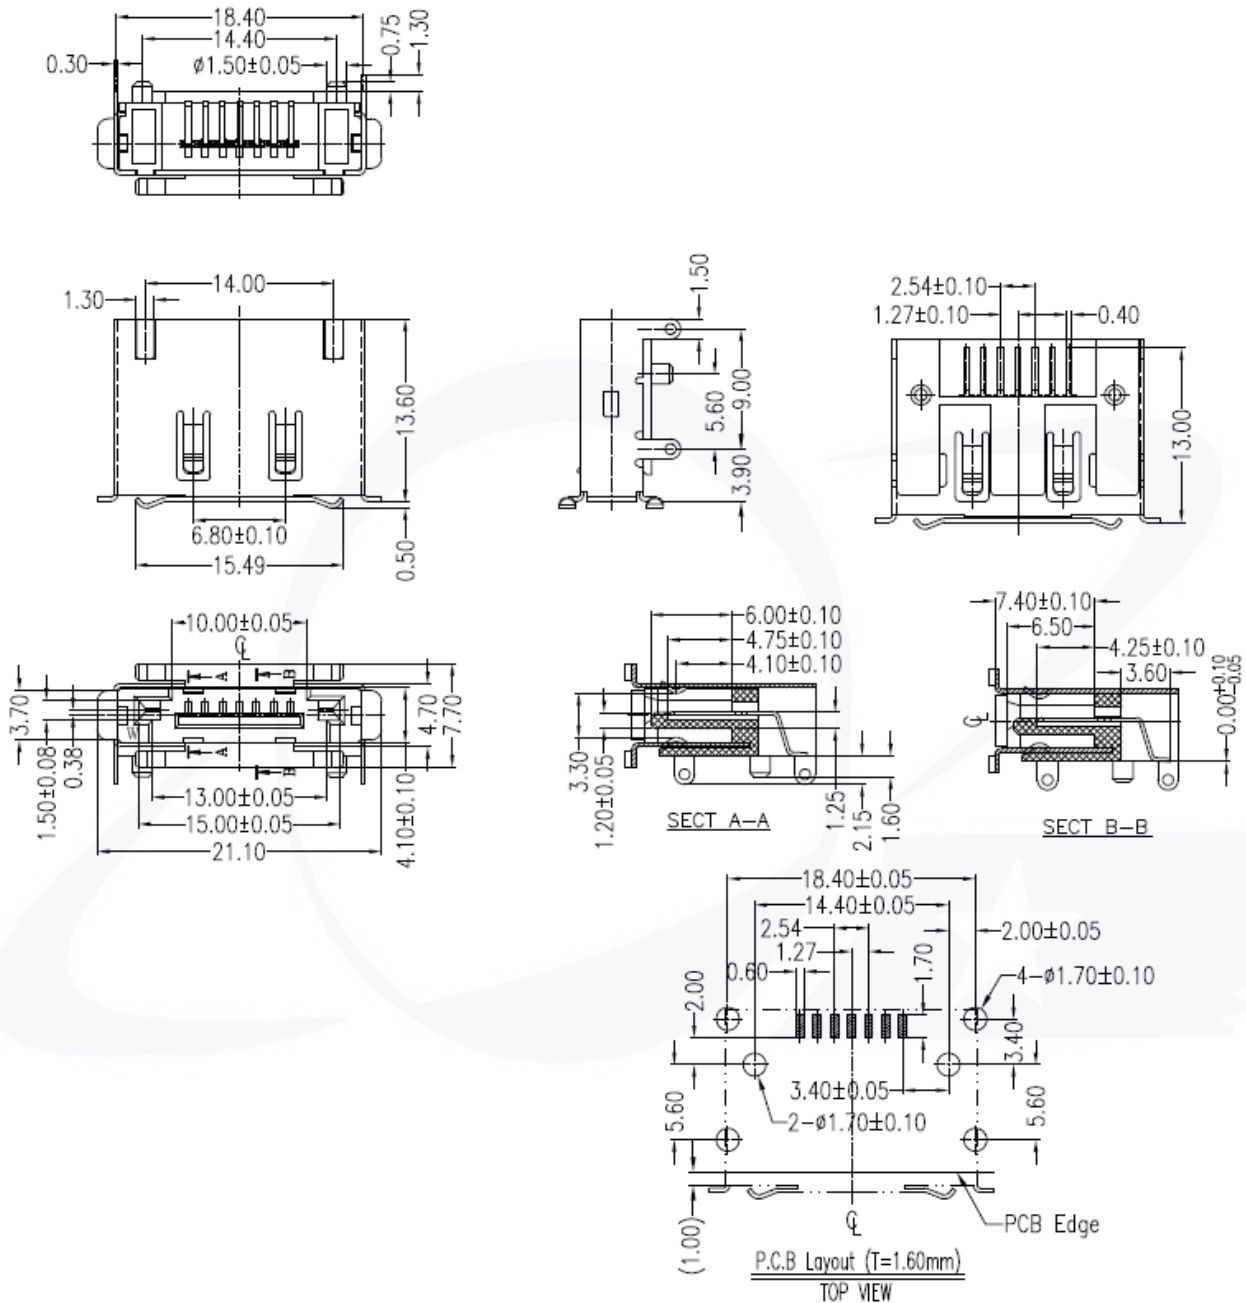

Series-	NO. of Contact	Type	Solder/ Contact Type	Angle	Contact Plating	Contact Material	Insulator Color	Packing	Option	Status-
EATA-	1-	07	[M] Male [SM] Standard/SMT	[R] Right Angle	[T15] Selective Gold 15u"	[B] Brass	[O] Black	[Y] Tray		[R]RoHS