

SATA CONNECTOR, 7+15 PINS, MALE, DIP, RIGHT ANGLE, FOR H.D.

Material


Housing: LCP(Black), UL 94V-0 Rated
 Contact: Brass
 Plating: Gold plating over Nickel on contact area
 Tin plating on solder tail.

Electrical

Current Rating: 1.5 Amp per contact.
 Contact Resistance: 30m ohm Min.
 Insulation Resistance: 1000 Megohms Min.
 Dielectric Withstanding Voltage: 500VAC

Environmental

Operating Temperature: -55°C to +85°C

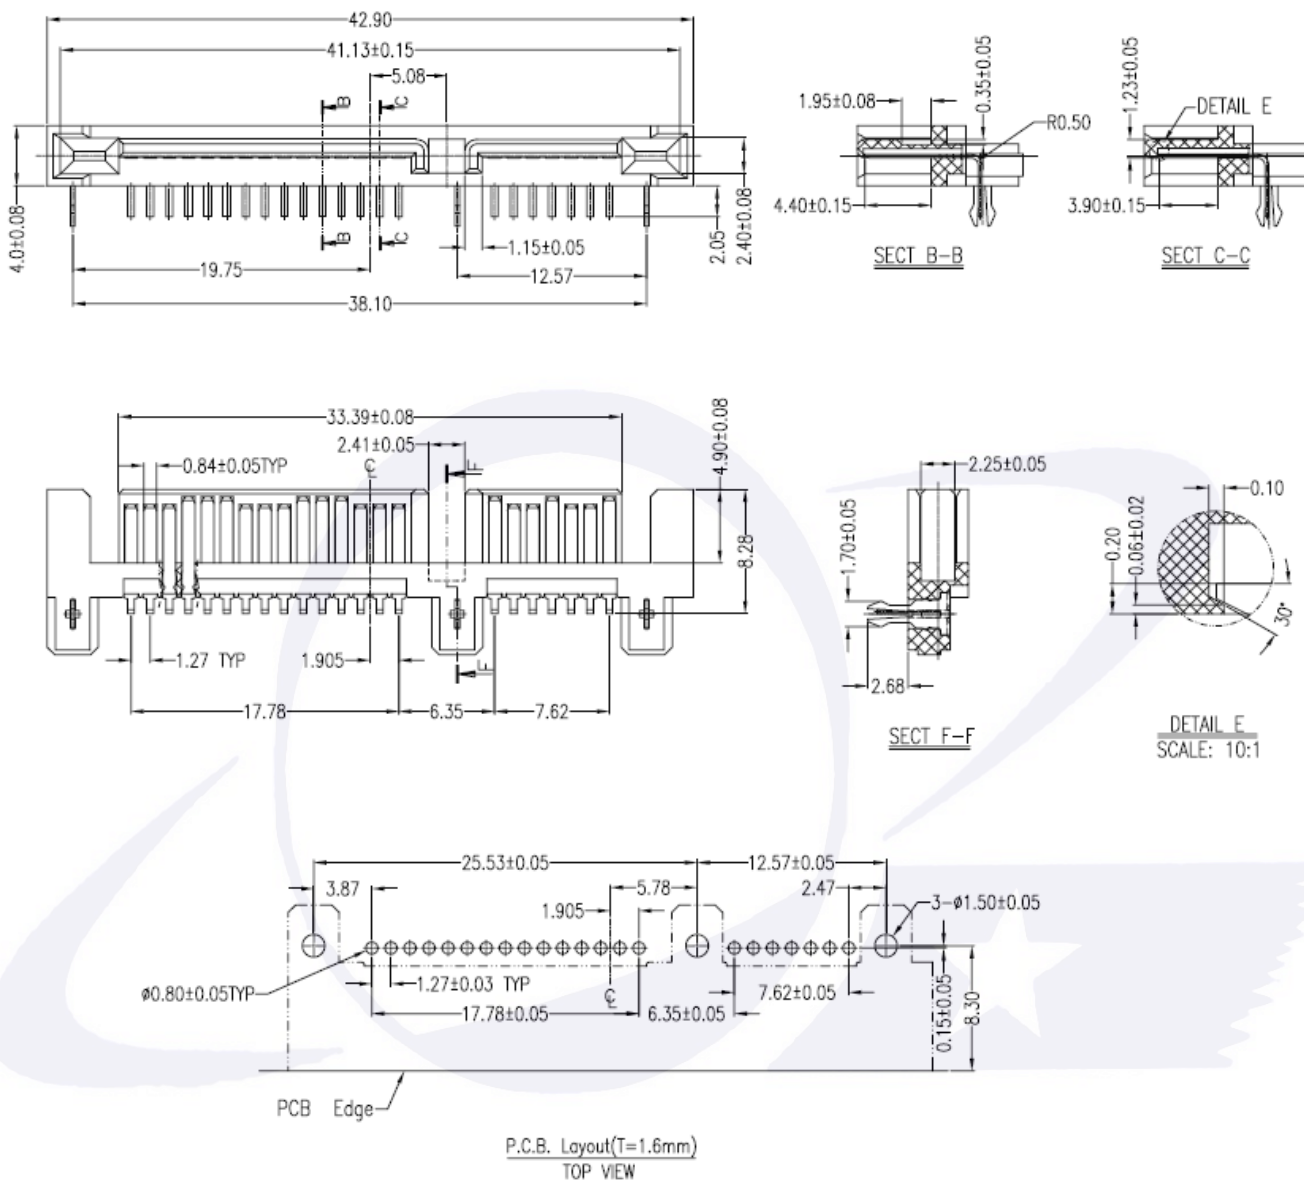

Series-	NO. of Contact	Type	Solder/ Contact Type	Angle	Contact Plating	Contact Material	Insulator Color	Packing	Option	Status-
ATA-	1-	22 [M] Male	[D] DIP	[R] Right Angle	[T5] Selective Gold 5u" [T15] Selective Gold 15u"	[B] Brass	[0] Black	[U] Tube		[R]RoHS