


POWER CONNECTOR MINI FIT, PITCH 4.20mm, SINGLE ROW, STRAIGHT DIP, HOOK 3.40mm

Material and finish





Contact: Brass, Tin plated
 Base: Nylon66, UL92V-2
 Pin: 2 to 6
 Packing: 1000pcs/ Bag

Electrical

Voltage rating: 600V AC/DC
 Current rating: 9A AC/DC
 Withstanding Voltage: 1500V AC/ Min.
 Insulation resistance: 1000M ohm Min.
 Temperature range: -40°C to +105°C
 Contact resistance: 20m ohms Max.

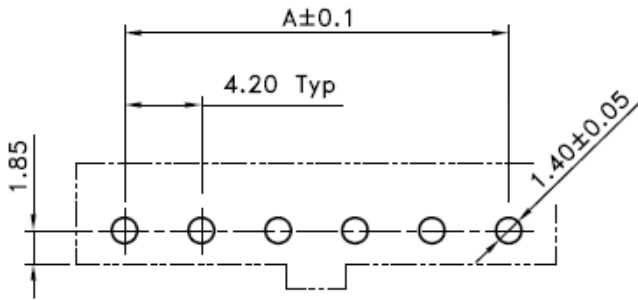

Poles	Dimensions(mm)	
	A	B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40

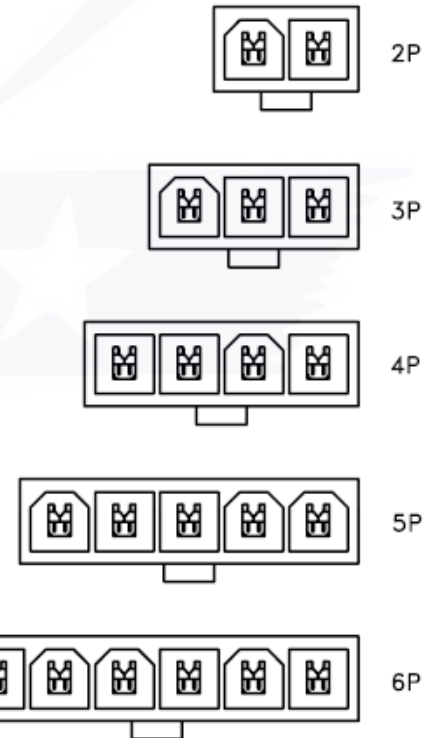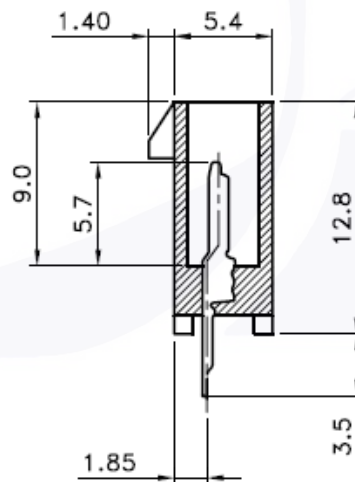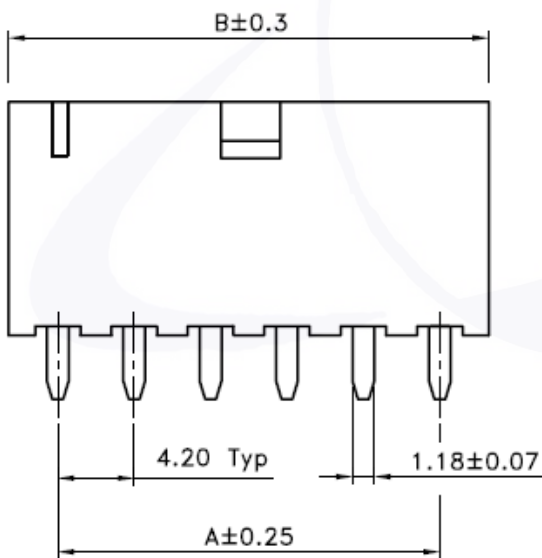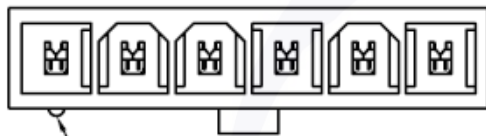

Series-	Pitch	Row	NO. of Pins Per Row	Type	Hook	Post	Color	Material	Packing	Option	Status-
PWB	1- [3] 4.20	[S] Single	xx 02-06	[S] Straight/ DIP	[2] 3.40	[0] W/O	[1] WHITE [11] IVORY [2] TRANSPARENT	[2] N66	[G] Bag		[R]RoHS