

USB CONNECTOR, FOR PCB, A TYPE, MALE, 4 PINS, SMT, REVERSE CONTACT

Material and Finish

Housing: Nylon PA9T G.F., Black

Terminal: Brass EH T:0.25mm, Gold/Tin plated
(Gold 1~3u", Ni 40~60u", Tin 120u")

Shell: Brass T:0.3mm, Nickel plated (Ni 80~120u")

Specification:

Contact Resistance: 30 ohms Max.

Insulation Resistance: 1000M ohms Min. at 500V DC.


Rated Voltage and Current: 1.5A at 250V AC Min.

Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute
500V AC (rms) for 1 Minute

Durability(Life Test): 1500 Cycles.

Insertion Force: 35 Newton Max.

Extraction Force: 10 Newton Min.

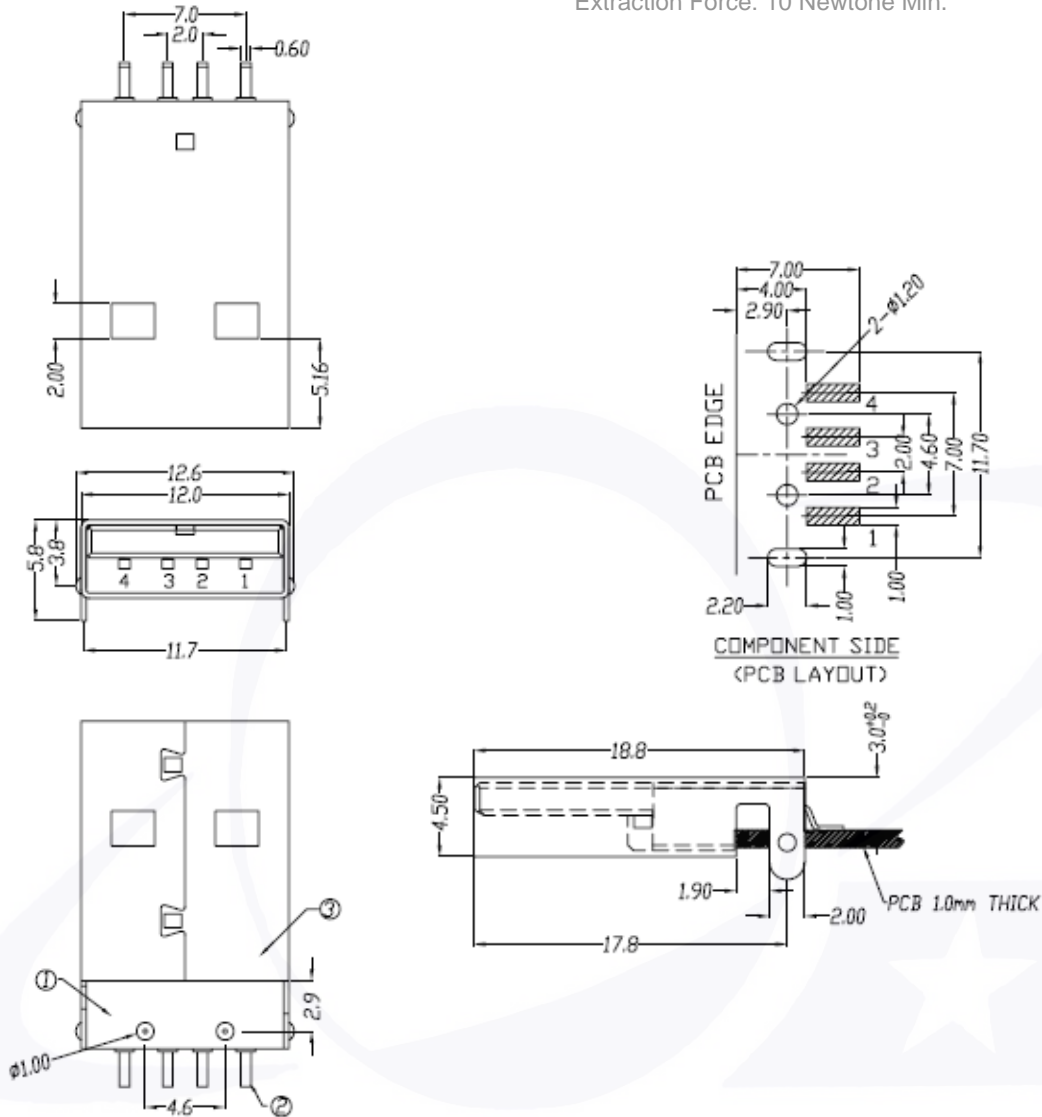

Series-	Type	Style	No. Pins	Insulator Color	Plating	Packing-	Option-	Status-
UP-	1- [A] A TYPE	[1] MALE	4	[0] BLACK	[T1] SELECTIVE GOLD PLATED 1u" [T30] SELECTIVE GOLD PLATED 30u"	[G] BAG [X] BOX [R] REEL [U] TUBE [Y] TRAY		[R]RoHS