






PHONE JACK NON-SHIELDED 6P4C SIDE ENTRY PHONE JACK WIRE 50MM

Material and Finish

Housing: ABS Resin (UL94V-0)
 Color: Grey
 Wire: UL1061 26 AWG
 Spring Wire: Dia. 0.46mm Phosphor Bronze Over Nickel plating and Gold plating optional 6u", 15u", 30u", 50u".

Electrical characteristics:

Insulation Resistance: 10M - ohm Min.
 Contact Resistance: 30m - ohm Max.
 Rating Current: 1.5A Min.
 Dielectric Voltage: AC1.0KV 1 minute Min.

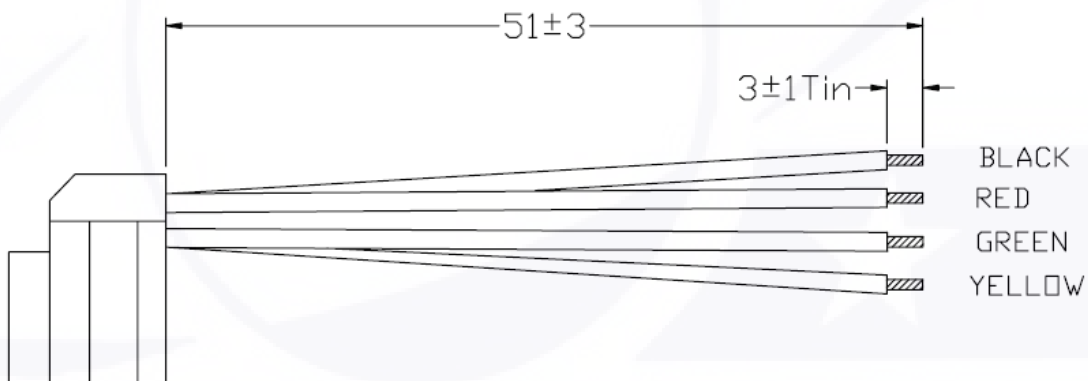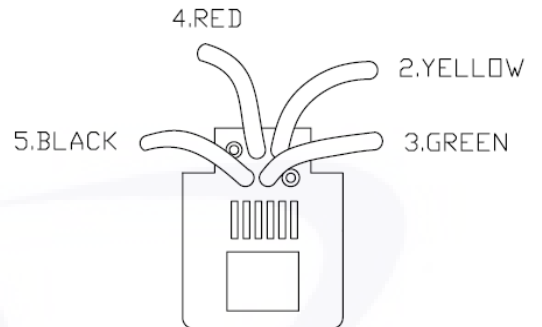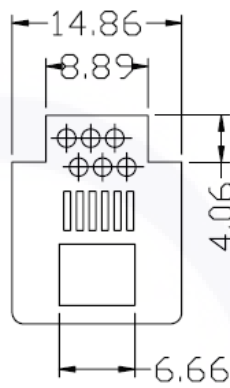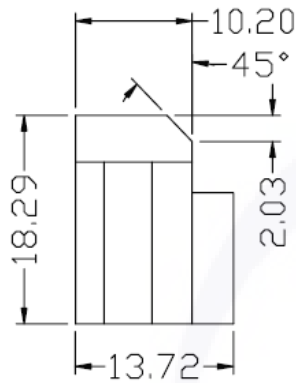

DESCRIPTION		623K 6P4C 50.8mm 50u" GREY		
NO	WIRE COLOUR	WIRE LENGTH	WIRE STRIP	GOLD-PLATING
2	YELLOW	51mm	3.0mm Tin	50u"
3	GREEN	51mm	3.0mm Tin	50u"
4	RED	51mm	3.0mm Tin	50u"
5	BLACK	51mm	3.0mm Tin	50u"

Series	Position	Contact	Angle	Deck	No. of Port	Plating	Color	Option	Packing	Status	
RJP-	1-	[6] 6	[4] 4	[R] 90°	[1] SINGLE DECK	[BLANK] SINGLE	[G6] GOLD PLATED 50u" [G15] GOLD PLATED 50u" [G30] GOLD PLATED 50u" [G50] GOLD PLATED 50u"	[8] GREY	L50	[G] BAG [X] BOX [R] REEL [U] TUBE [Y] TRAY	[R] RoHS