



## HOOK SWITCH 6 PINS

### Specification




Rating: DC 48V 200mA  
 Contact Resistance: 50m ohms Max.  
 Insulation Resistance: 100M ohms Min.  
 Dielectric Strength: AC 500V for 1 Minute  
 Operating Force: 50±10gf  
 Life: 300,000 Cycles  
 Operating Temperature Range: -10~+60°C

Spring: Stainless Steel  
 Terminal: Brass Strip  
 Contact: Phosphor-Bronze  
 Pluger: P.B.T.  
 Base: P.B.T.  
 Cover: POM  
 Shaft: POM

Auto Soldering: 260±5°C, 5±1 Sec.  
 Manual Soldering: 350±10°C, 3~4 Sec.

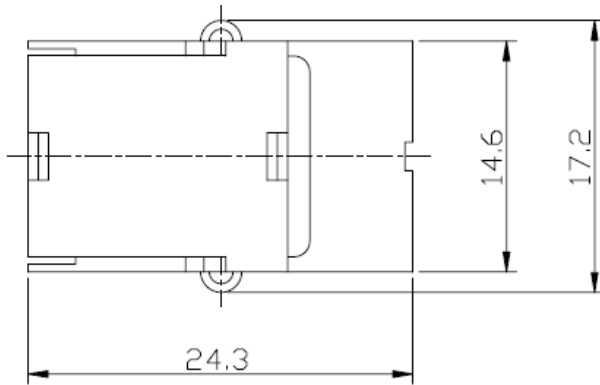

**SCHEMATIC**

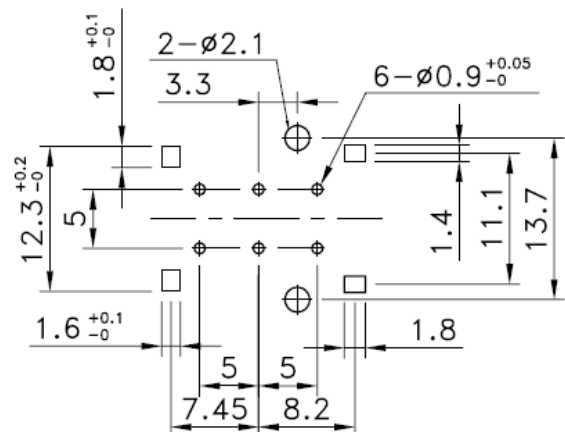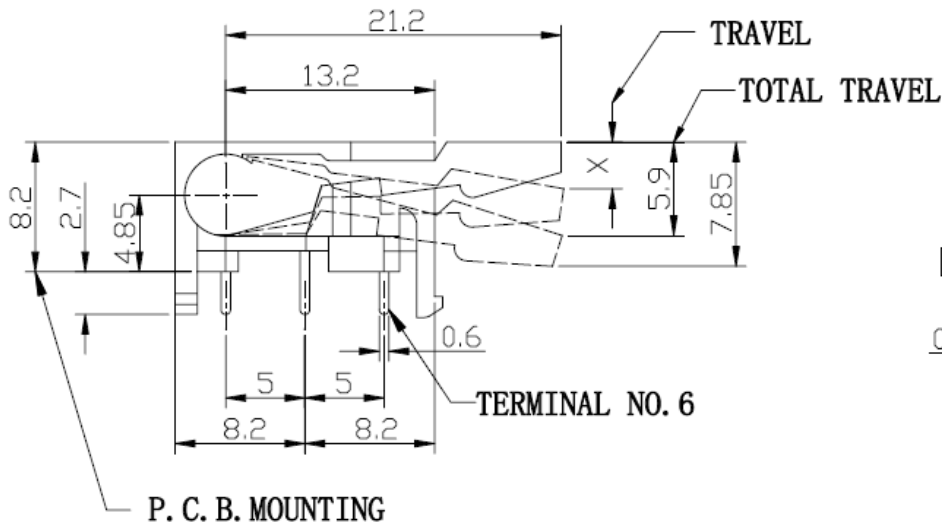

Series NO.	Free Code	Pin	Status
SW-	1-	06	[R] RoHS