


WAFER CONNECTOR, PITCH 2.00, SMT, RIGHT ANGLE, SINGLE ROW, DISCONNECTABLE CRIMP STYLE

Material and Finish






Base: High Temp. Plastic UL 94V-0
 Contact: Phos. Bronze
 Bar.: Brass
 Plated: Refer the above narrative
 Thickness: 0.2mm

Electrical


Current Rating: 3A AC/DC
 Withstanding Voltage: 500V AC for 1 minute.
 Insulation Resistance: 1000M ohms Min.
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20M ohms Max.

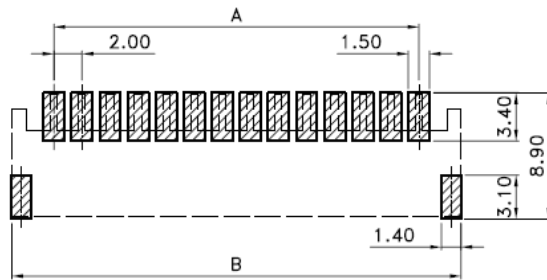



RECOMMENDED PCB LAYOUT DIM.

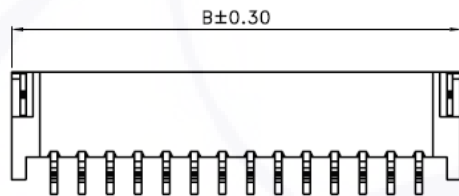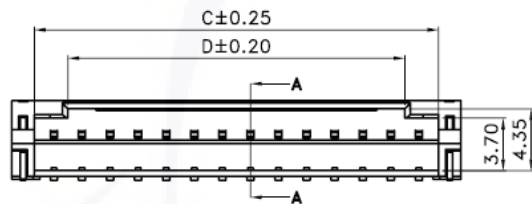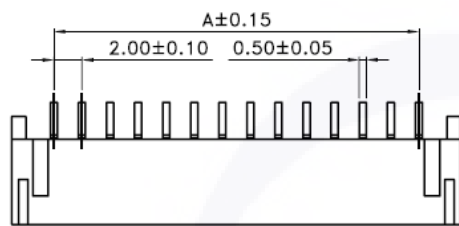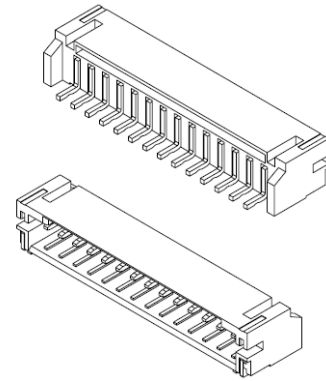

RECOMMENDED ASSEMBLY DIM.



SECTION A-A



Material with Halogen Free

Poles	Dimensions(mm)			
	A	B	C	D
2	2.00	8.00	4.80	1.00
3	4.00	10.00	6.80	2.00
4	6.00	12.00	8.80	4.00
5	8.00	14.00	10.80	6.00
6	10.00	16.00	12.80	8.00
7	12.00	18.00	14.80	10.00
8	14.00	20.00	16.80	12.00
9	16.00	22.00	18.80	14.00
10	18.00	24.00	20.80	16.00
11	20.00	26.00	22.80	18.00
12	22.00	28.00	24.80	20.00
13	24.00	30.00	26.80	22.00
14	26.00	32.00	28.80	24.00
15	28.00	34.00	30.80	26.00
16	30.00	36.00	32.80	28.00

Series	Free Code	Pitch	Style	Plating
WFO	1-	[D] 2.00mm	[RM] 90°/SMT	[T0] TIN PLATED