






WAFER CONNECTOR, PITCH 2.00, SMT, STRAIGHT, SINGLE ROW, CRIMP STYLE

Material and Finish

Contact: Phos. Bronze, Tin Plated.
 Base: Nylon 9T UL94V-0
 Cap: Nylon PA46 UL 94V-0

Electrical

Voltage Rating: 100V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 800V AC/Minute
 Insulation Resistance: 1,000M ohms Min.
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20m ohms Max.

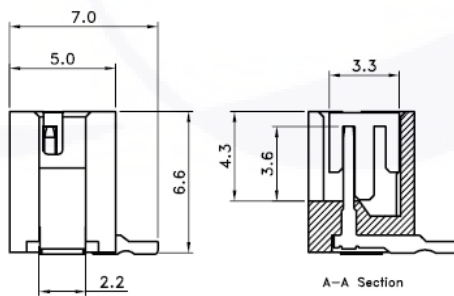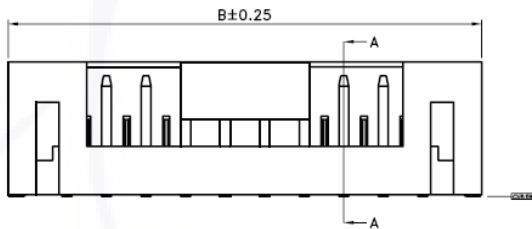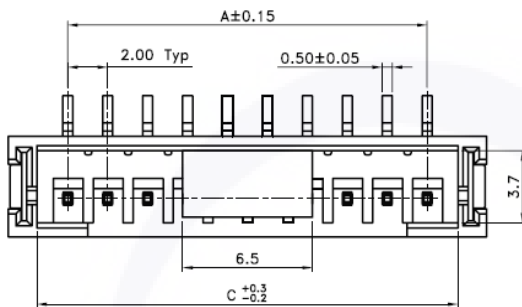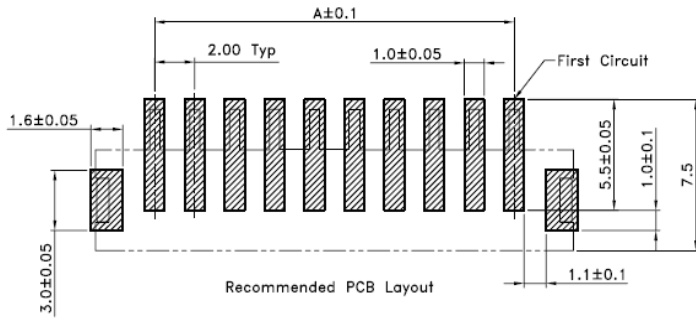

Poles	Dimensions(mm)		
	A	B	C
2	2.00	8.00	5.00
3	4.00	10.00	7.00
4	6.00	12.00	9.00
5	8.00	14.00	11.00
6	10.00	16.00	13.00
7	12.00	18.00	15.00
8	14.00	20.00	17.00
9	16.00	22.00	19.00
10	18.00	24.00	21.00
11	20.00	26.00	23.00
12	22.00	28.00	25.00
13	24.00	30.00	27.00
14	26.00	32.00	29.00
15	28.00	34.00	31.00
16	30.00	36.00	33.00

Series	Free Code	Pitch	Style	Plating
WFO	1-	[D] 2.00mm	[SM] 180° SMT [T0]	TIN PLATED