


BOX HEADER, PITCH 2.00mm, STRAIGHT, DUAL ROWS
Material and Finish

Housing: Polyester, UL 94-0, Black
 Contact Material: Brass
 Gold, Tin or Duplex plated
 Duplex plated: Gold plated on contact area;
 Tin plated on solder area.


Electrical

Current Rating: 2Amp
 Voltage Rating: 125V
 Insulator Resistance: 3000 Megohms Min.
 Contact Resistance: 20m ohms Max.
 Dielectric Withstanding: AC 500V/minute
 Operating Temperature: -40 ~+105°C

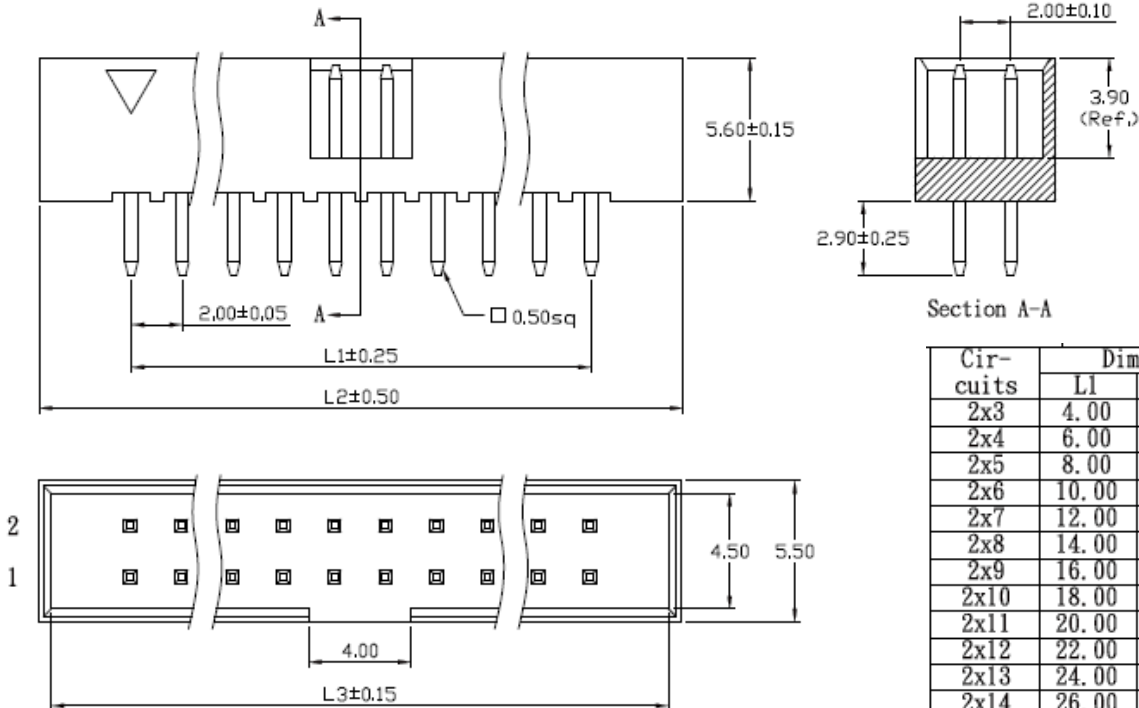

Section A-A

Cir- cuits	Dimension mm		
	L1	L2	L3
2x3	4.00	13.20	12.20
2x4	6.00	15.20	14.20
2x5	8.00	17.20	16.20
2x6	10.00	19.20	18.20
2x7	12.00	21.20	20.20
2x8	14.00	23.20	22.20
2x9	16.00	25.20	24.20
2x10	18.00	27.20	26.20
2x11	20.00	29.20	28.20
2x12	22.00	31.20	30.20
2x13	24.00	33.20	32.20
2x14	26.00	35.20	34.20
2x15	28.00	37.20	36.20
2x16	30.00	39.20	38.20
2x17	32.00	41.20	40.20
2x18	34.00	43.20	42.20
2x19	36.00	45.20	44.20
2x20	38.00	47.20	46.20
2x21	40.00	49.20	48.20
2x22	42.00	51.20	50.20
2x23	44.00	53.20	52.20
2x24	46.00	55.20	54.20
2x25	48.00	57.20	56.20
2x26	50.00	59.20	58.20
2x27	52.00	61.20	60.20
2x28	54.00	63.20	62.20
2x29	56.00	65.20	64.20
2x30	58.00	67.20	66.20
2x31	60.00	69.20	68.20
2x32	62.00	71.20	70.20
2x33	64.00	73.20	72.20
2x34	66.00	75.20	74.20


RECOMMENDED P. C. B. LAYOUT

Series-	Pitch	Row	Plating	Plastic Height	NO. PINS
BHS-	1- [3] 2.00	[3] 2.00	[T0] TIN PLATED, LIGHT TIN [T1] SELECTIVE GOLD PLATED 1u" [G1] FULL GOLD PLATED 1u"	560	2x_