


**FEMALE HEADER SMT HEIGHT 4.30 PITCH 1.27 ROW SPACE 1.27 DUAL ROWS LAYOUT 5.21**

**Material and Finish**

Housing: Hi-Temp. Plastic (UL 94V-0), Black.  
Terminal: Copper Alloy (t=0.15), Gold Plating.

**Electrical**

Current Rating: 1.0 AMP. Max.  
Insulation Resistance: 1000M ohms Min. at 500V DC.  
Dielectric Withstanding Voltage: 600V AC RMS for 60 seconds  
Contact Resistance: 30m Ohms Max.  
Operating Temperature: -55°C ~ +105°C

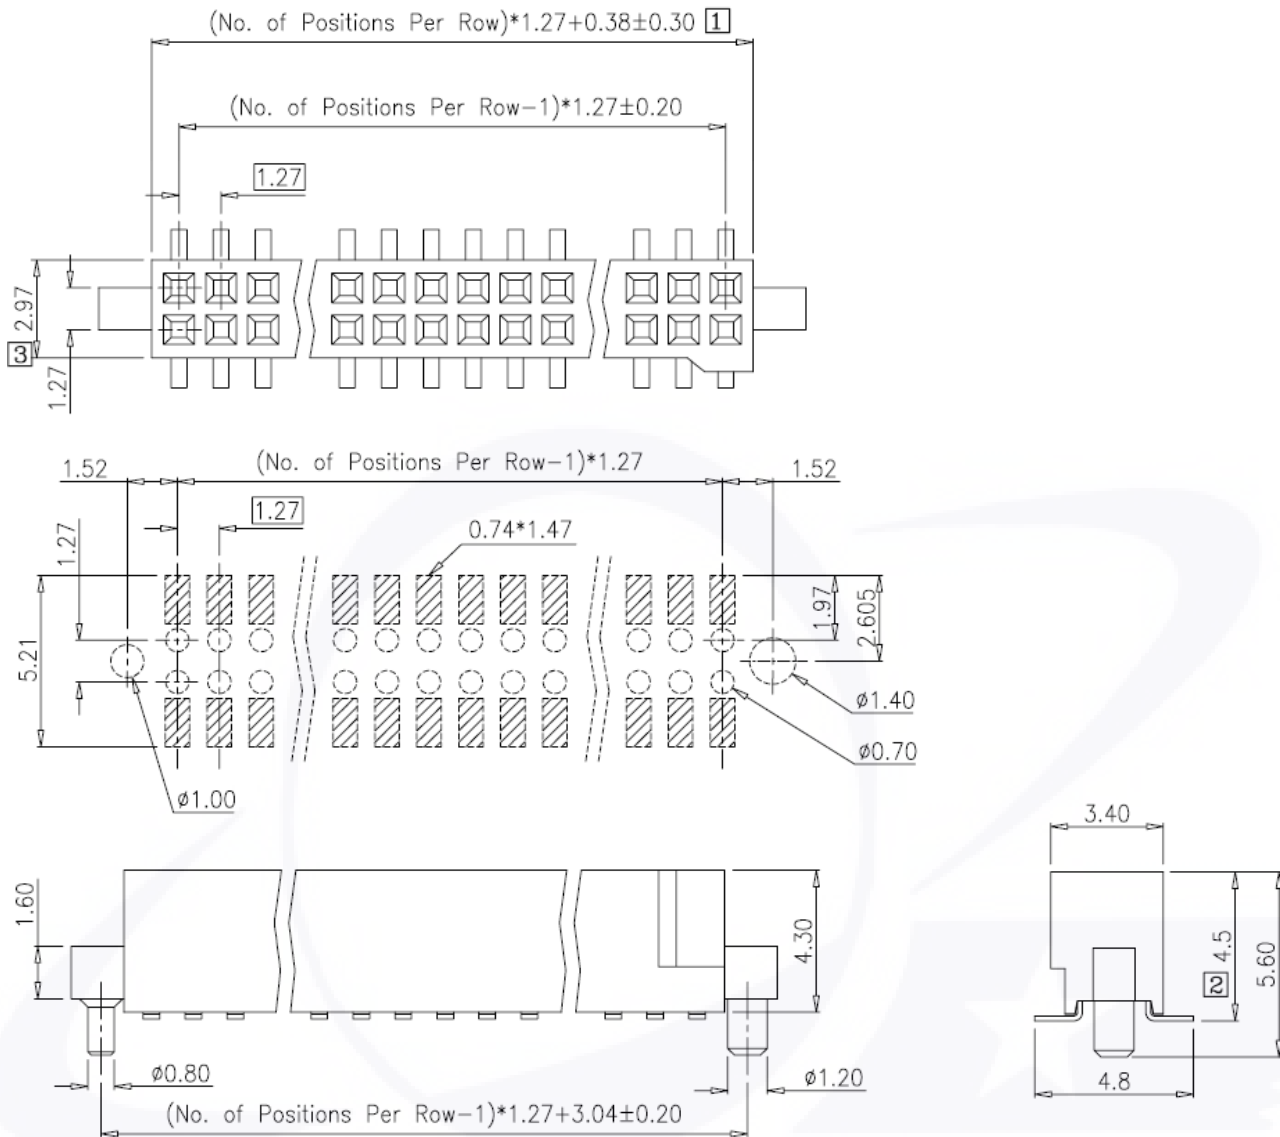

Series	Pitch	Row	Post	Plating	Plastic Height	layout	Option	NO. Pins
FM- (SMT)	1- [2] 1.27	[2] 1.27	[1] W/	[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	430	521		2x_