


FEMALE HEADER SMT HEIGHT 4.00 PITCH 2.00 ROW SPACE 2.00 DUAL ROWS (LAYOUT 6.50)
Material and Finish

Insulator Material: High Temperature Thermoplastic + Glass Fibre UL94V-0
 Color: Black
 Contact: Phosphor Bronze
 Plating: Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated: Gold plated on contact area
 Tin on solder area

Electrical

Current Rating: 2 AMP
 Insulation Resistance: 1000M ohms Min.
 Dielectric Withstanding: AC 500V/minute.
 Operating Temperature: -40°C ~ +105°C

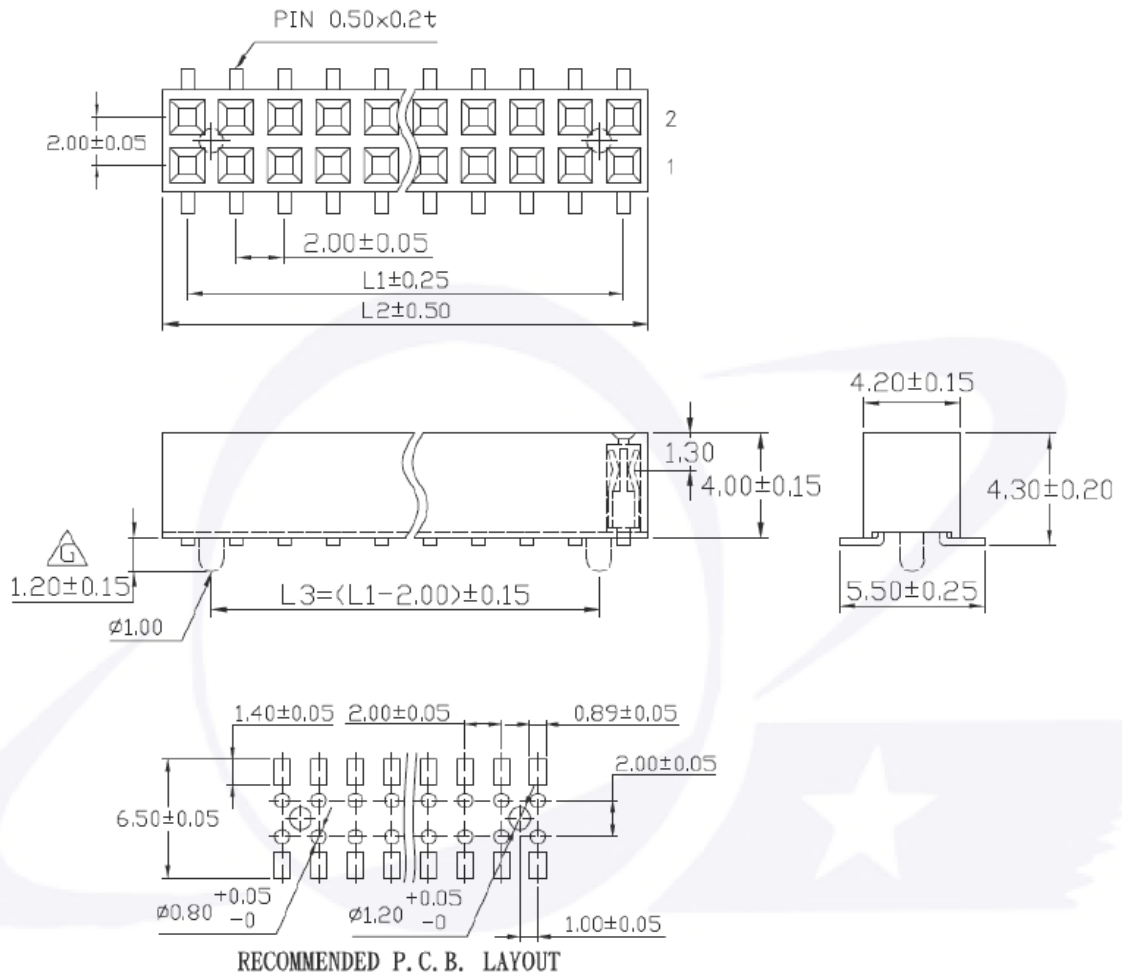

Series	Pitch	Row	Post	Plating	Plastic Height	Layout	Option	NO. Pins
FM- (SMT)	1- [3] 2.00	[3] 2.00	[1] W/	[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	400	650		2x_