


**FEMALE HEADER STRAIGHT HEIGHT 4.00 PITCH 2.00 ROW SPACE 2.00 DUAL ROWS (CONTACT 2.60)**

**Material and Finish**

Insulator Material: High Temperature Thermoplastic + Glass Fibre UL94V-0  
 Color: Black  
 Contact: Phosphor Bronze  
 Plating: Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated: Gold plated on contact area  
 Tin on solder area

**Electrical**

Current Rating: 2 AMP  
 Insulation Resistance: 1000M ohms Min.  
 Contact Resistance: 20m ohms Max.  
 Dielectric Withstanding: AC 500V/minute.  
 Operating Temperature: -40°C ~ +105°C

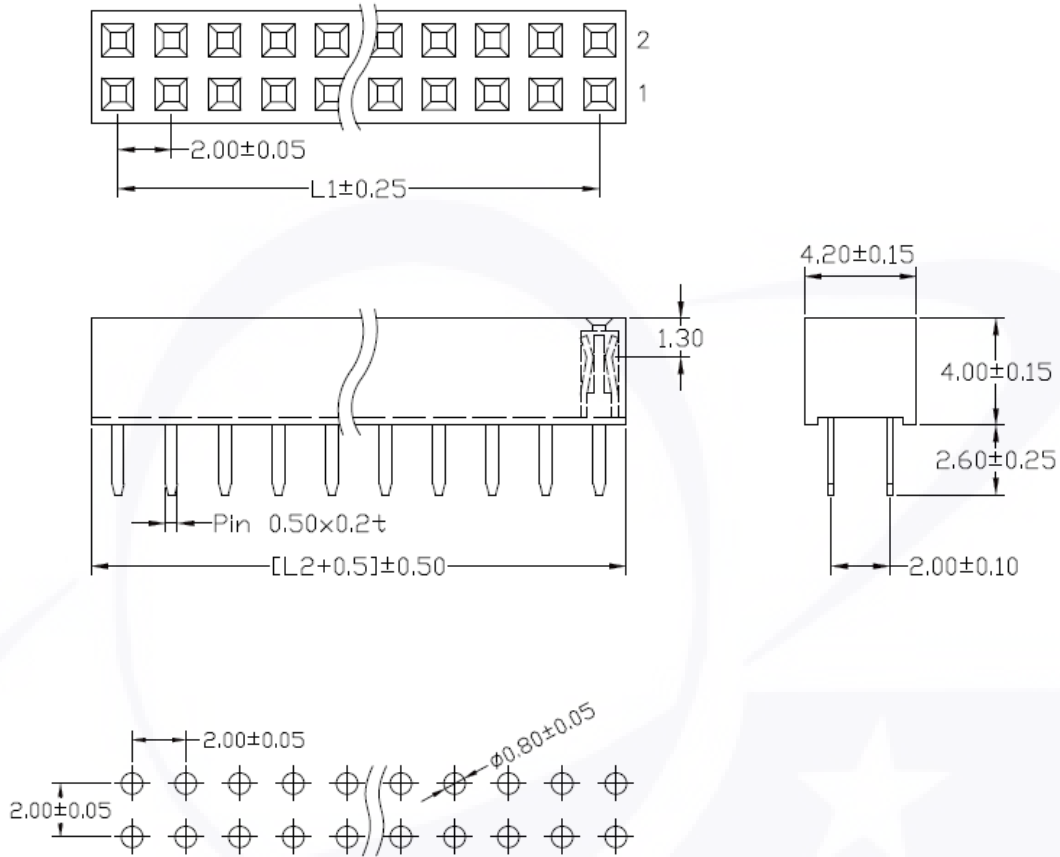

**RECOMMENDED P. C. B. LAYOUT**

Series	Pitch	Row	Post	Plating	Plastic Height	Contact	Option	NO. Pins
FS- (STRAIGHT)	1- [3] 2.00	[3] 2.00	[0] W/O	[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	400	260		2x_