



FEMALE HEADER, SIDE ENTRY, HEIGHT 5.95, PITCH 2.54, ROW SPACE 7.62, DUAL ROWS, CONTACT 3.00

Specification


Current Rating: 3 Amp
 Insulation Resistance: 1000M ohms Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20 m ohms Max.
 Operating Temperature: -40°C to +105°C

Material

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0

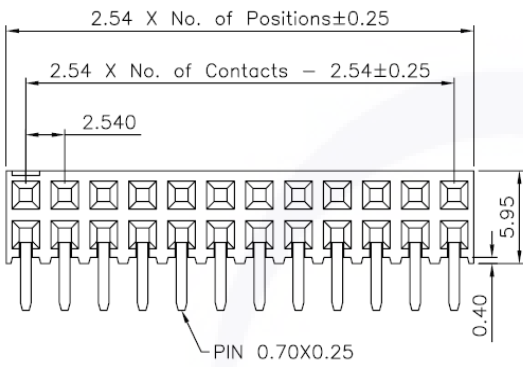

Recommended P.C.Board Hole Layout



Series	Pitch	Row	Post	Plating	Plastic Height	Pin Length	Option	N0. Pins
FHR-	1-	[4] 2.54 [7] 7.62	[0] W/O	[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	-595	-300		2x_