





POWER CONNECTOR MINI FIT, PITCH 4.20mm, DUAL ROWS, RIGHT ANGLE DIP, HOOK 3.40mm, WITH SCREW HOLE

Material and finish

Contact: Brass, Tin plated
 Base: Nylon66, UL92V-2
 Pin: 2 to 24

Electrical

Voltage rating: 250V AC/DC
 Current rating: 7A AC/DC
 Withstanding Voltage: 1500V AC/ Min.
 Insulation resistance: 1000M ohm Min.
 Temperature range: -25°C to +85°C
 Applicable PC board thickness: 1.6mm

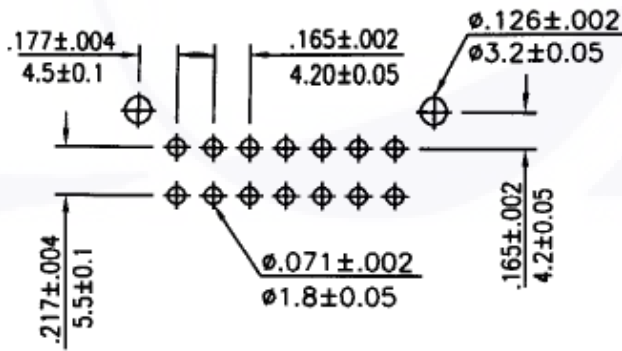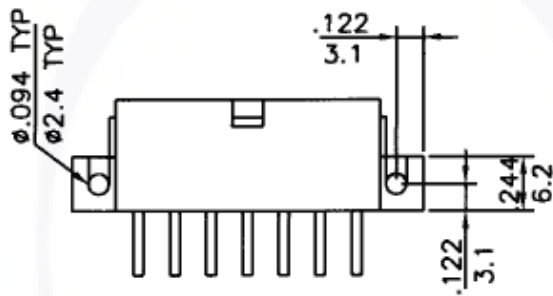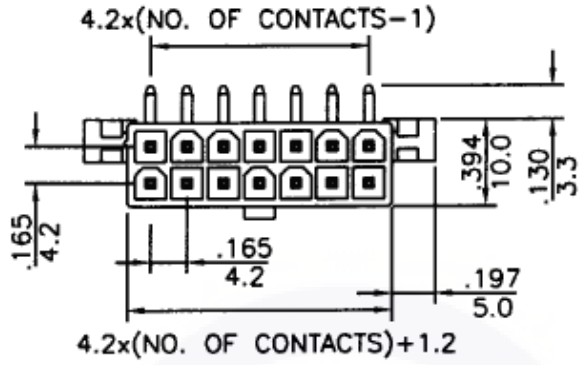

P.C. Board Layout

Series-	Pitch	Type	Hook	Post	Color	Material	Plated	NO. PINS	Opinion
PWB	1- [3] 4.20	[R] Right Angle/ DIP	[2] 3.40	[1] W/	[1] WHITE [11] IVORY [2] TRANSPARENT	[2] N66	[T0] TIN PLATED		[W] SCREW HOLE