

PIN HEADER, HEIGHT 2.54, PITCH 2.54, SINGLE ROW, STRAIGHT, DIP, CONTACT 2.50, TAIL 2.50

Material



Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0

Finish

Tin, Gold Plated
 Standard: Gold Flash all over

Electrical

Current Rating: 3 Amps
 Insulation Resistance: 5000M ohms Min.
 Withstanding Voltage: 1000V AC
 Operating Temperature: -40°C ~ +105°C

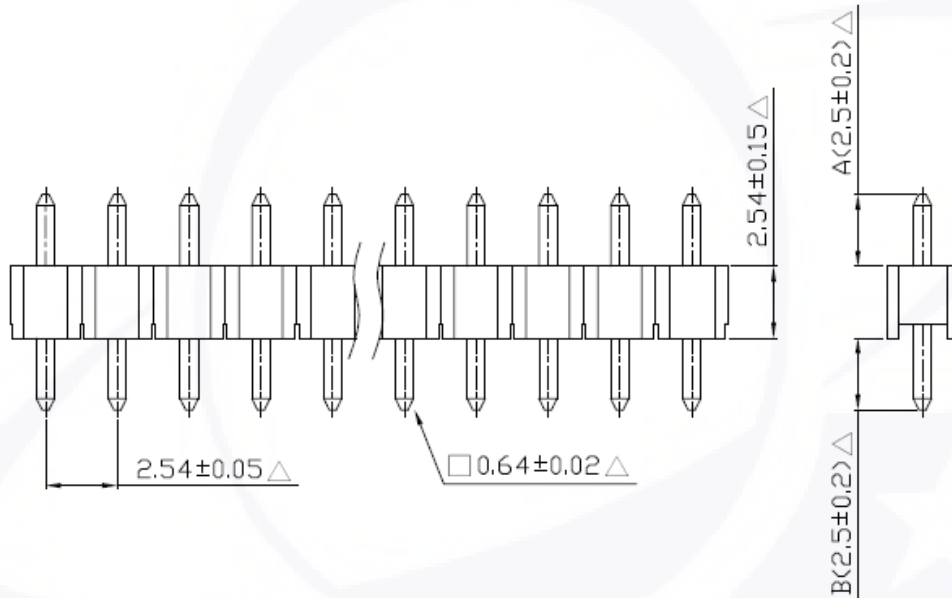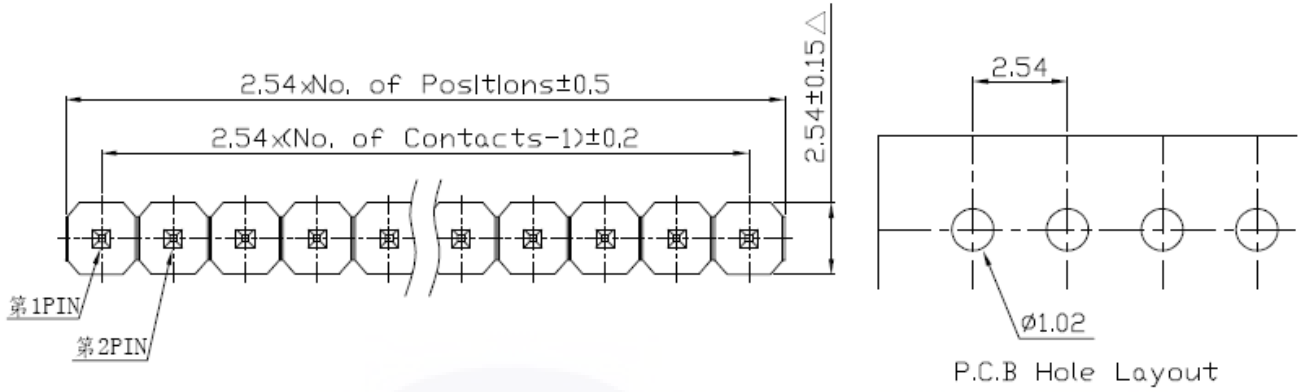

Series	Pitch	Row	Plating	Plastic Height	Pin Length	Option	N0. Pins
P1S-	[4] 2.54	[0]	[G1] FULL GOLD PLATED 1u" [G15] FULL GOLD PLATED 15u"	254	-025025 (A / B)		1X_