


POWER CONNECTOR PLUG PITCH 4.20mm, DUAL ROWS

Base: Nylon66, UL92V-2; Color: Nature
Poles: 2~24 Circuit

Voltage rating: 250V AC/DC
Current rating: 7A AC DC
Withstanding Voltage: 1500V AC/ Min.
Insulation resistance: 1000M ohm Min.
Temperature range: -25°C to +120°C

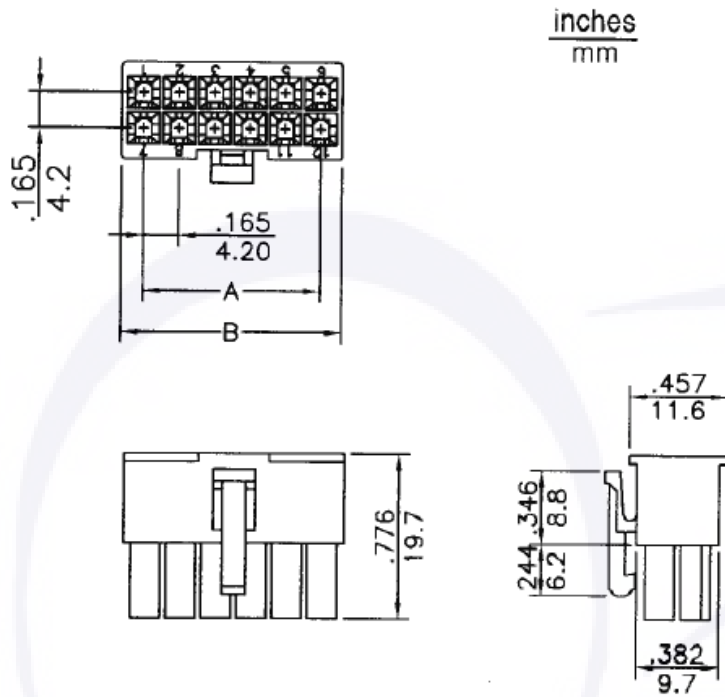

CIRCUITS	DIMENSION in.(mm)	
	A	B
2		0.217(5.5)
4	0.165(4.20)	0.382(9.7)
6	0.331(8.40)	0.547(13.9)
8	0.496(12.60)	0.713(18.1)
10	0.661(16.80)	0.878(22.3)
12	0.837(21.00)	1.043(26.5)

CIRCUIT	DIMENSION in.(mm)	
	A	B
14	0.992(25.20)	1.209(30.7)
16	1.157(29.40)	1.374(34.9)
18	1.323(33.60)	1.539(39.1)
20	1.488(37.80)	1.705(43.3)
22	1.654(42.00)	1.870(47.5)
24	1.819(46.20)	2.035(51.7)

Series-	Pitch	Type	Color	Material	NO. PINS
PWC	2- [3] 4.20	[S] 180°/DIP	[2] TRANSPARENT	[2] N66	2X_