



PLCC SOCKET, SMT TYPE

Material and Finish

Housing: PPS +30%GF, UL 94V-0
 Contacts: Phosphor Bronze, Tin Plated.

Electrical

Current rating: 1 AMP.
 Voltage: 250V AC/DC Max.
 Dielectric Withstanding: 500V AC for 1 minute.
 Contact Resistance: 30M ohms Max.
 Insulation Resistance: 1000M ohms Min.
 Operating Temperature: -55°C ~ +105°C
 Retention Force: 0.30kg per pin Min.

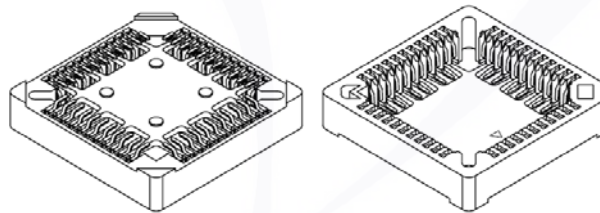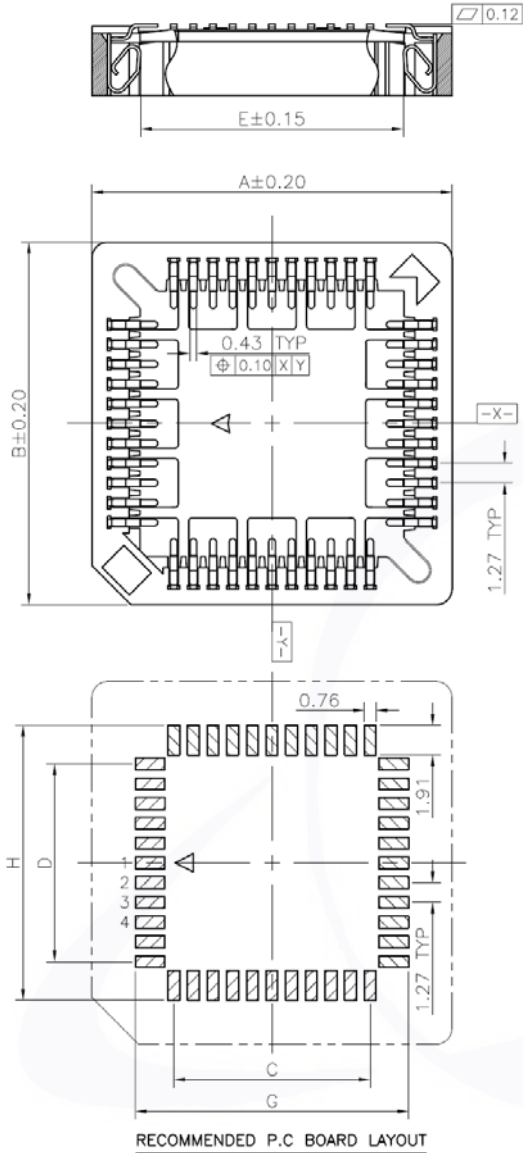

Dimension No. OF Pin (mm)	A	B	C	D	E	F	G	H
SMT-20P	15.65	15.65	5.08	5.08	9.35	9.35	10.03	10.03
SMT-28P	18.19	18.19	7.62	7.62	11.89	11.89	12.57	12.57
SMT-32P	20.65	18.15	10.16	7.62	14.35	11.85	13.56	12.80
SMT-44P	23.27	23.27	12.70	12.70	16.97	16.97	17.65	17.65
SMT-52P	25.81	25.81	15.24	15.24	19.51	19.51	20.19	20.19
SMT-68P	30.89	30.89	20.32	20.32	24.59	24.59	25.27	25.27
SMT-84P	35.97	35.97	25.40	25.40	29.67	29.67	30.35	30.35

Series	Height	No. Pins	Post	Terminal Thick	Plating	Color	Packing	Status
PLCM-	[1] 4.6	[0] 20 [2] 28 [3] 32 [4] 44 [5] 52 [6] 68 [8] 84	[0] W/O	[2] 0.20	[T0] TIN PLATED	[0] BLACK [3] BROWN	[R] REEL [U] TUBE	[R] RoHS